

**Grid Code
Modification Proposal
Form**

Email to gridcode@eirgrid.com



Title of Modification Proposal:

MPID349 Non-Mandatory Grid-Forming Requirements for HVDC Units

MPID (EirGrid Use Only): 349

Date:	26/03/2026
Company Name:	EirGrid
Applicant Name:	EirGrid
Email Address:	Gridcode@eirgrid.com
Grid Code Version:	16
Grid Code Section(s) Impacted by Modification Proposal:	<ul style="list-style-type: none">• PC.A6• CC.7.5• Definitions

Modification Proposal Justification:

Purpose:

The purpose of this modification is to incorporate grid forming capabilities for Interconnectors in anticipation of the upcoming HVDC 2.0 requirements. The minimum grid forming technical requirements for Interconnectors introduced in this modification are non-mandatory and non-retrospective.

Background:

The European Union framework for HVDC systems, established under Commission Regulation (EU) 2016/1447 [1], is currently being updated through the HVDC 2.0 process. Following a request from the European Commission, ACER developed proposed amendments under the Connection Network Codes 2.0 programme. This work led to Recommendation 01/2024 [2], issued in December 2024, which sets out a revised NC HVDC 2.0 and includes provisions on grid forming capability.

ACER's public consultation on the draft amendments for HVDC 2.0 showed support for the inclusion of grid forming provisions, while also emphasising that these should remain flexible rather than mandatory for all HVDC projects. With respect to feedback received, ACER concluded that grid forming requirements should be incorporated in the Network Codes, leaving flexibility for mandatory or voluntary implementation to the relevant System Operators [3]. Within the proposed NC HVDC 2.0 text, Article 14 introduces grid forming capability on a functional, performance-based basis, without prescribing the converter design or its internal control implementation [2]. This regulation is pending approval by the European Commission.

ENTSO-E also recommends that, pending adoption and implementation of amended Connection Network Codes, TSOs update the relevant national technical connection requirements as soon as possible [4]. It also advises that, without such updates, key technologies, including grid forming converters, remain outside the current framework, increasing operational and cross-border risks.

International precedent supports this approach. In Great Britain, Grid Code Modification GC0137 introduced a non-mandatory minimum specification for grid forming capability in 2022 [5]. In Germany, national HVDC requirements are set out in VDE-AR-N 4131 and supported by guidance on grid forming behaviour and verification [6], [7].

At national level, the All-Island Grid Forming Strategy, published by EirGrid and SONI in February 2026 [8], was developed through an eight-month programme of engagement with industry stakeholders during 2025. It sets out a structured pathway for the integration of grid forming capability on the All-Island Power System. The Strategy identifies the need for Grid Code amendments and proposes a staged approach beginning with non-mandatory provisions and trials, followed by mandatory requirements aligned with the entry into force of RfG 2.0 and HVDC 2.0.

Introducing non-mandatory HVDC grid forming provisions at this stage therefore provides early visibility of emerging requirements and supports alignment with both the All-Island Grid Forming Strategy and anticipated European developments. This modification proposal also supports the development of operational experience with HVDC grid forming behaviour, as captured in the “All Island Operational Policy Roadmap” [9].

This Grid Code modification should be understood as an intermediate step supporting the non-mandatory phase identified in the All-Island Grid Forming Strategy. The proposed requirements are non-mandatory and non-retrospective. Existing HVDC installations would not be required to retrofit equipment or change their operating modes as a result of this proposal. Where grid forming capability is offered by an interconnector owner, this modification defines the expected behaviour at the Grid Connection Point and provides a basis for assessment and compliance in grid forming mode.

The drivers for this Grid Code modification reflect the evolving operational needs of the All-Island power system. As the level of synchronous generation declines, system inertia and system strength decrease, increasing the likelihood of interactions between converter-based resources and creating new stability challenges. Grid forming controls allow converter-based resources like HVDC, wind and solar PV to provide stabilising functions traditionally delivered by synchronous machines, supporting secure operation as the system transitions to higher levels of renewable generation [9]. When this capability is provided, it will enhance the strength of the Transmission System and will support stable and secure operation with increased shares of renewable generation.

References

- [1] European Commission, “Commission Regulation (EU) 2016/1447 of 26 August 2016 establishing a network code on requirements for grid connection of high voltage direct current systems and direct current-connected power park modules,” *Official Journal of the European Union*, Aug. 2016. [Online]. Available: <https://eur-lex.europa.eu/eli/reg/2016/1447/oj/eng>
- [2] Agency for the Cooperation of Energy Regulators (ACER), “Recommendation No. 01/2024 on reasoned proposals for amendments to Commission Regulation (EU) 2016/1447,” Dec. 2024. [Online]. Available: https://www.acer.europa.eu/sites/default/files/documents/Recommendations/ACER_Recommendation_01-2024_on_NC_HVDC.pdf
- [3] Agency for the Cooperation of Energy Regulators (ACER), “Annex 3 to Recommendation No. 01/2024,” Dec. 2024. [Online]. Available: <https://www.acer.europa.eu/acer-recommendation-01-2024-reasoned-proposals-amendments-network-code-requirements-grid-connection-high-voltage-direct-current-systems-and-direct-current-connected-power-park-modules>
- [4] ENTSO-E, “ENTSO-E position on the need for national connection requirements to ensure EU power system stability,” Dec. 22, 2025. [Online]. Available: <https://www.entsoe.eu/2025/12/22/entso-e-position-on-the-need-for-national-connection-requirements-to-ensure-eu-power-system-stability/>
- [5] Office of Gas and Electricity Markets (Ofgem), “Grid Code Modification GC0137: Authority Decision,” Jan. 2022. [Online]. Available: <https://www.ofgem.gov.uk/decision/grid-code-modification-gc0137-authority-decision>

- [6] VDE FNN, "VDE-AR-N 4131: Technical Connection Rule for the connection of HVDC systems and generation plants connected via HVDC systems," Mar. 2019. [Online]. Available: <https://www.vde.com/en/fnn/topics/technical-connection-rules/tcr-hvdc>
- [7] VDE FNN, "Grid forming behaviour of HVDC systems and DC-connected Power Park Modules," guideline. [Online]. Available: <https://www.vde.com/en/fnn/dokumente-en>
- [8] EirGrid and SONI, "All-Island Grid Forming Strategy," Feb. 2026. [Online]. Available: <https://cms.eirgrid.ie/sites/default/files/publications/Grid-Forming-Strategy-February-2026.pdf>
- [9] EirGrid and SONI, "Operational Policy Roadmap 2025–2035," Mar. 2025. [Online]. Available: <https://cms.eirgrid.ie/sites/default/files/publications/EirGrid-SONI-Operational-Policy-Roadmap-2025-2035.pdf>

Red-line Version of Impacted Grid Code Section(s) - show proposed changes to text:

Deleted text in ~~strike-through red font~~ and new text highlighted in *blue font*

PC.A6 Interconnector Data Requirements

PC.A6.1. Interconnector Operating Characteristics and Registered Data

(v) Interconnector power electronic converter and control systems

- (h) If the Interconnector has **Grid Forming** capability, the following additional data shall be provided to the **TSO**:
- Positive and negative sequence **Effective Impedance (z_{eff})** and X/R ratio of the **Interconnector Converter Station**.
 - Equivalent Inertia Constant (H_{eq}).
 - Damping ratio.
 - Frequency-dependent impedance of the **Interconnector Converter Station** in the frequency range from 5 Hz to 2500 Hz for a representative number of operating points and control modes.

CC.7.5.13 GRID FORMING

CC.7.5.13.1 The conditions specified in this section of the **Grid Code** apply to **Interconnector Converter Stations** with **Grid Forming** capability including those operated in **Interconnector STATCOM State**, unless otherwise specified.

CC.7.5.13.2 The conditions specified in this section of the **Grid Code** are in addition to those specified in CC.7.5.1 to CC.7.5.12 for **HVDC Units**, excluding the clauses listed below. The equivalent clause applicable to **Grid Forming** are included between brackets for clarity:

- CC.7.5.9.5(a) does not apply for **Grid Forming** (CC.7.5.13.13 applies for **Grid Forming**)
- CC.7.5.12.5 does not apply for **Grid Forming** (CC.7.5.13.12.2 for **Grid Forming**)
- CC.7.5.12.6 does not apply for **Grid Forming** (CC.7.5.13.12.3 for **Grid Forming**)

CC.7.5.13.3 The **Interconnector Converter Station(s)** shall have the capability to remotely enable/disable the **GFM Mode** upon **TSO** request. The details of this functionality will be provided by the **TSO**.

When the **GFM Mode** is disabled in all **Interconnector Converter Stations**, all clauses from CC.7.5.1 to CC.7.5.12 will apply to the **Interconnector** instead of CC.7.5.13.

CC.7.5.13.4 The conditions specified in this section of the **Grid Code** apply at the **Grid Connection Point** of the **Interconnector Converter Station**, unless otherwise specified.

CC.7.5.13.5 The performance requirements specified in CC.7.5.13.8, CC.7.5.13.9 and CC.7.5.13.10 shall be met within the **Interconnector** current and energy limits for any operating point within the U-Q/Pmax profile defined in CC.7.5.10.d, voltage ranges defined in CC.7.5.1.1 (v), frequency ranges defined in CC.7.5.1.1 (t), and short circuit capacity (in MVA) at each **Connection Point** provided by the **TSO** in accordance with CC.7.5.12.1.

For weak system strength conditions, below the minimum short circuit capacity (in MVA) at the **Grid Connection Point** provided by the **TSO** in accordance with CC.7.5.12.1, including islanded operation, the **Interconnector** performance may deviate from the conditions specified in this section of the Grid Code but the **Interconnector Converter Station** shall be capable of stable operation within the ranges defined in CC.7.5.1.1(t) and CC.7.5.1.1(v).

CC.7.5.13.6 The performance requirements specified in CC.7.5.13.8, CC.7.5.13.9 and CC.7.5.13.10 shall be met for any initial operating point within the U-Q/Pmax profile defined in CC.7.5.10.d, for the following **Transmission System Disturbances** and during **Network** topology changes:

- A voltage phase angle jump of $\pm 10^\circ$ applied within the **Transmission System**.
- A voltage magnitude jump of ± 0.1 p.u. applied within the **Transmission System**, provided that the final expected operating point is within the U-Q/Pmax profile.
- A **ROCOF** of 1Hz/s for a duration 1s, provided that the sum of initial operating point and expected **Synthetic Inertia Contribution** remain within the U-Q/Pmax profile.

The response to the above **Disturbances** shall be provided within the **Interconnector Converter Station** or **Interconnector** available headroom. Reduced performance is acceptable when the **Interconnector Converter Station** or **Interconnector** limits are reached. For the avoidance of doubt, the **Interconnector** is not required to reserve any headroom.

CC.7.5.13.7 The **Active Power** response resulting from **GFM** behaviour at the remote end **Interconnector Converter Station** caused by a **Disturbance** as observed at their **Grid Connection Point**, shall not cause larger **Active Power** variation on the other **Interconnector Converter Station(s)** than the Active Power response as seen at the remote end **Interconnector Converter Station**.

CC.7.5.13.8 **Voltage Source Behaviour**

CC.7.5.13.8.1. Within the **Interconnector** voltage, current and energy limits, the **Interconnector Converter Station** shall be capable of behaving as a controllable voltage source behind an internal impedance (i.e. a Thevenin source) during both the normal operation and immediately after a grid **Disturbance**. The Thevenin source is characterized by its constant internal voltage amplitude, voltage phase angle, frequency, and internal impedance.

After the first instants of the **Disturbance**, the parameters of the Thevenin voltage source can change to support the secure operation of the **Transmission System**.

CC.7.5.13.8.2. The **Interconnector** shall actively contribute to the generation of the AC voltage waveforms, by providing **Synchronising Active Power** and **Voltage Stiffness**, within the **Interconnector** current and energy limits, immediately after a voltage **Disturbance** (phase angle or/and magnitude) in the **Transmission System**. The **Interconnector Converter Stations** shall emulate a Thevenin source behind an impedance as immediate response to a **Transmission System Disturbance**. The dynamic behaviour is described in CC.7.5.13.8.4 and CC.7.5.13.8.5.

CC.7.5.13.8.3. The **Interconnector Converter Station** effective positive and negative sequence impedances (without current limitation) shall be within the range of [0.2 to 0.5] in per unit, with a minimum X/R ratio of 10. The selected final value shall be communicated to the **TSO**.

The **Interconnector Converter Station** effective impedance, in positive and negative sequences, is defined in per unit as:

$$z_{eff\ pu} = \frac{Z_{eff\ SI}}{Z_{base}}$$

$$z_{eff\ SI} = \sqrt{x_{eff\ SI}^2 + r_{eff\ SI}^2}$$

$$Z_{base} = \frac{V_{base}^2}{S_{base}}$$

$$S_{base} = \sqrt{P_{base}^2 + Q_{base}^2}$$

Where:

- $z_{eff\ SI}$ is the **Interconnector Converter Station** effective impedance at the nominal **Transmission System** frequency, seen from the **Grid Connection Point** in Ohms (Ω). It includes the aggregate of physical equipment impedances such as cables, transformers and filters, and the virtual impedance from the control.
- $x_{eff\ SI}$ is the **Interconnector Converter Station** effective reactance at the nominal **Transmission System** frequency, seen from the **Grid Connection Point** in Ohms (Ω). It includes the aggregate of physical equipment reactances such as cables, transformers and filters, and the virtual reactance from the control.
- $r_{eff\ SI}$ is the **Interconnector Converter Station** effective resistance at the nominal **Transmission System** frequency, seen from the **Grid Connection Point** in Ohm. It includes the aggregate of physical equipment resistances such as cables, transformers and filters, and the virtual resistance from the control.
- V_{base} is nominal phase to phase RMS voltage in kV of the **Interconnector Grid Connection Point**.
- S_{base} is the base MVA power of the **Interconnector**.
- P_{base} is the **Interconnector Registered Capacity** in MW.
- Q_{base} is the maximum absolute value of **Reactive Power** capability, in either consumption (Import/lead) or production (Export/lag), of the **Interconnector Converter Station** in Mvar, as defined in CC.7.5.10.

CC.7.5.13.8.4. The **Interconnector** shall have the capability to provide **Synchronising Active Power**. This means that, following a voltage phase angle jump within the **Transmission System**, the **Interconnector** shall react immediately by varying its **Active Power** at the **Grid Connection Point**, within its current and energy limits, in a manner that counteracts the **Disturbance**, with an amplitude that depends on the network and converter impedances. Considering the measurement bandwidth and the dynamics of converter internal quantity limitations, the immediate **Active Power** response shall be observed within 5 ms to 20 ms of the voltage phase angle jump occurrence (measurements shall be done in compliance with IEC 61400-21-1).

For **Interconnectors** with at least two **Interconnector Converter Stations** in **GFM mode**, or for **Interconnector STATCOM State**, the capability to provide **Synchronising Active Power** for a voltage phase angle jump within the **Transmission System** may be limited by its inherent energy buffer. The **Interconnector Owner** shall agree the expected **Synchronising Active Power** with the **TSO**.

CC.7.5.13.8.5. The **Interconnector** shall have the capability to provide **Voltage Stiffness**. This means that, following a positive sequence voltage magnitude jump within the **Transmission System**, the **Interconnector** shall react immediately by varying its **Reactive Power** at the **Grid Connection Point**, within its current and energy limits, in a manner that counteracts the **Disturbance**, with an amplitude that depends on the network and converter impedances. Considering the measurement bandwidth and the dynamics of converter internal quantity limitations, the immediate **Reactive Power** response shall be observed within 5 ms to 20ms of the voltage magnitude jump occurrence (measurements shall be done in compliance with IEC 61400-21-1).

CC.7.5.13.8.6. The **Interconnector Converter Stations** shall have the capability to provide **Self-synchronisation**.

CC.7.5.13.9 **Synthetic Inertia Contribution**

CC.7.5.13.9.1 The **Interconnector** shall have the capability to provide **Synthetic Inertia Contribution** for high and low frequency conditions, within its current and energy limits, with an equivalent inertia constant (H_{eq}) of at least 3MW / MVA.. The **Synthetic Inertia Contribution** shall be provided without delay. This means that, during ROCOF up to ± 1 Hz/s within the **Transmission System**, the **Interconnector** shall immediately adjust the **Active Power** transfer at the **Grid Connection Point**, within its current and energy limits, proportionally to the ROCOF experienced the **Grid Connection Point** such as:

$$\Delta P_{pu} = -2H_{eq} \frac{1}{f_0} \times ROCOF$$

For **Interconnectors** with at least two **Interconnector Converter Stations** in **GFM mode**, or for **Interconnector STATCOM State**, the capability to provide **Synthetic Inertia Contribution** may be limited. The **Interconnector Owner** shall agree the expected **Synthetic Inertia Contribution** with the **TSO**.

The **Interconnector Owner** shall agree the value of the equivalent inertia (H_{eq}) with the **TSO**, even if it is below the specified value or effective only for a limited duration.

CC.7.5.13.9.2 The **Synthetic Inertia Contribution** shall be provided with a damped system response and the **Active Power** transfer at the **Grid Connection Point** shall smoothly return to its reference value with a damping ratio ξ of 0.4 or higher.

CC.7.5.13.10 **Expected Behaviour when reaching Current Capability Limits**

CC.7.5.13.10.1. If the **GFM** response of the **Interconnector** exceeds the **Interconnector Converter Station** capability limit, current limitation can be implemented. The response to changes in voltage phase angle, amplitude and/or frequency shall be equivalent to that of a voltage source (or a synchronous generator), except that the current magnitude may be limited as specified in CC.7.5.13.10.2. Under such conditions, the **Interconnector** shall remain stable and ensure a smooth, bump-less transition without interruption, operating continuously. The **Interconnector Converter Station** current limitation shall not lead to a switch of control mode. As soon as **Transmission System** conditions permit, the **Interconnector Converter Station** shall return to its normal operating capability (without current limitation) with a smooth, bump-less transition.

CC.7.5.13.10.2. During a **Voltage Dip** requiring current limitation, the **Interconnector Converter Station** shall limit its output current by reducing the magnitude of the current phasor only, while preserving its phase angle, such that the total magnitude complies with the **Interconnector Converter Station** current limit.

The unsaturated fault current is defined as the theoretical current delivered by an equivalent constant voltage source behind an impedance (without current limitations) when subjected to a fault on the **Transmission System** that produces the same voltage dip at the **Grid Connection Point**. The unsaturated fault current is calculated as follows:

$$I_{sc-unsat} = \frac{V_{conv} \cdot V_{gcp}}{Z_{eff}} \quad [\text{p.u.}]$$

Where:

- $I_{sc-unsat}$: is the unsaturated (unlimited) short circuit current contribution from the **Interconnector Converter Station** (p.u.).
- Z_{eff} : is the **Interconnector Converter Station** effective impedance at the **Grid Connection Point** (p.u.)
- v_{conv} : is the **Interconnector Converter Station** internal voltage magnitude prior to (and in the first instants of) the voltage dip (p.u.)
- v_{gcp} : is the retained voltage magnitude at the **Grid Connection Point** during the **Voltage Dip** (p.u.)

The required **Interconnector Converter Station** output current limitation is illustrated in Figure CC.7.5.13.10. For the avoidance of doubt, the expected response during current limitation is the saturated fault current I_{sc-sat} .

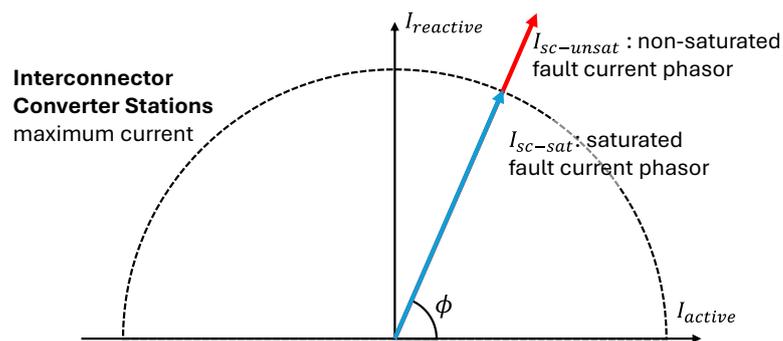


Figure CC.7.5.13.10: Illustration of GFM Current limitation

CC.7.5.13.10.3. When the **Transmission System** voltage magnitude and/or voltage phase angle recovers towards the pre-**Disturbance** grid conditions, the **Interconnector Converter Station** shall react with an instantaneous reduction of current, once the unlimited voltage source behaviour results in a current below the **Interconnector Converter Station** capability limits.

CC.7.5.13.11 **GFM Withstand Capability**


CC.7.5.13.11.1 The **Interconnector** shall have **withstand capabilities** for the **Transmission System** conditions defined in CC.7.5.1.1 and below:

- Phase-angle jump at the **Grid Connection Point** up to $\pm 30^\circ$.
- Any sudden **Transmission System** topology change under the range of short circuit power (in MVA) and network characteristics specified by the **TSO** in CC.7.5.1.1(x).

Under these conditions at the **Grid Connection Point**, the **Interconnector Converter Station** shall remain connected to the **Transmission System** and operate in a stable and controllable manner while **Interconnector's** operational limits (such as voltage, current and/or energy) may be reached. However, the **Interconnector** shall not introduce oscillations in the **Transmission System** and shall not trip or block, even temporarily.

- CC.7.5.13.11.2 It is accepted that the **GFM** performance requirements specified in CC.7.5.13.8, CC.7.5.13.9 and CC.7.5.13.10 may be compromised for **Disturbance** levels at the **Grid Connection Point** between the limits defined in CC.7.5.13.6 (performance limits) and CC.7.5.13.11.1 (withstand limits). The **Interconnector Owner** shall communicate to the **TSO** any reduced performance capability in this operating range.
- CC.7.5.13.12 **Fault Ride Through**
- CC.7.5.13.12.1. The **Interconnector Converter Stations** shall provide immediate and inherent voltage support, according to the **Interconnector Converter Station Effective Impedance** defined in CC.7.5.13.8.3, during symmetric and asymmetric **Voltage Dips** as defined in CC.7.5.12.1. If this voltage support requires output current limitations, it shall be performed according to the principles defined in CC.7.5.13.10.
- CC.7.5.13.12.2. During **Voltage Dips**, no priority shall be given to any current component, whether active or reactive, positive sequence or negative sequence.
- CC.7.5.13.12.3. After a **Voltage Dip**, the **Interconnector** shall reach its **Active Power** set-point as quickly as the **GFM Mode** allows, considering dependencies with the selected equivalent inertia constant (H_{eq}), and in any event the **Interconnector** shall provide at least 50% and 90% of its **Active Power** set-point within 500 ms and 1.5 seconds, respectively, of the **Transmission System Voltage** recovering to 90% of nominal **Voltage**. This requirement does not apply to **Interconnector STATCOM State**.
- CC.7.5.13.12.4. At **Fault Disturbance** clearance, the **Interconnector Converter Station** shall support the **Transmission System** voltage recovery by providing **Reactive Power** but shall not contribute to voltage overshoot by more than 5% of pre-fault voltage.
- CC.7.5.13.13 The speed of response of the **Voltage Regulation System** shall be such that, following a step change in **Voltage** at the **Grid Connection Point** the **Interconnector Converter Station** shall achieve 90 % of its steady-state **Reactive Power** response within 3 seconds. The **Reactive Power** shall settle at the steady-state **Reactive Power** response within 10 seconds, with a steady-state **Reactive Power** tolerance no greater than 5 % of the maximum **Reactive Power**. Subject to agreement with **TSO**, the **Voltage Regulation Set-point** may be operated with or without a deadband selectable in a range from zero to $\pm 5\%$ of reference 1 p.u. **Transmission System Voltage**, with continuous setting. **Voltage Regulation Set-point** shall include the capability to change **Reactive Power** output based on a combination of a modified set-point **Voltage** and an additional instructed **Reactive Power** component. The **TSO** will specify a slope with a range and step on a site-specific basis.
- CC.7.5.13.14 The **Interconnector** may have the capability to provide **Voltage Balancing**. If this capability is provided, the **Interconnector Converter Station** shall behave as a pure positive sequence voltage source behind the equivalent impedance as defined in CC.7.5.13.8.3. The negative-sequence current shall vary linearly with the magnitude of the negative-sequence voltage no less than 3% negative-sequence current of the nominal current.
- CC.7.5.13.15 The **Interconnector** may provide **Islanding Capability** and **Re-synchronisation Capability**, as agreed with the **TSO**. The conditions and parameters of these capabilities shall be agreed with the **TSO**.
- CC.7.5.13.16 The **Interconnector** may provide **Black Start Capability**. If this capability is provided, the **Black Start Station** shall be able to remain in **GFM Mode** with no change of control mode. The **Black Start** requirements defined in OC.4.7 remain applicable.

Definitions
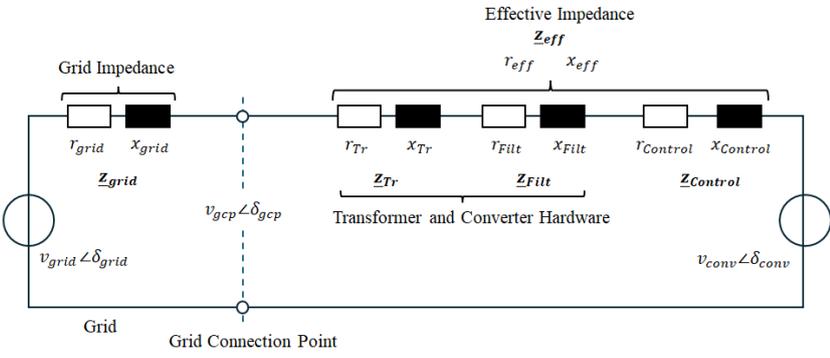
<p>Effective Impedance (z_{eff})</p>	<p>This is the GFM Interconnector Converter Station impedance observed at the Grid Connection Point at nominal frequency. For clarity, this effective impedance includes the aggregate of all physical impedances such as transformer, cables and converter impedance, and the virtual impedance from the control at nominal frequency. The Effective Impedance (z_{eff}) is illustrated in the following equivalent circuit representation:</p> 
<p>Grid-Forming (GFM)</p>	<p>The expected requirement for Interconnector with GFM characteristics is for it to be capable of appearing at the Grid Connection Point as a passive source such that, following a Disturbance, it results in the injection of current, within its current capability limits, in the sub-transient and transient frame (sub-cycle up to tens of cycles) in a manner that helps oppose the impact of the Disturbance.</p>
<p>Grid-Forming (GFM) Mode</p>	<p>Control mode of a Interconnector Converter Station which corresponds to and fulfils the GFM functional requirements as specified in this Grid Code.</p>
<p>Interconnector STATCOM State</p>	<p>A specific state of an Interconnector Converter Station, which is DC isolated from the other Interconnector Converter Station(s), with or without the DC transmission lines or cable connected to it.</p>
<p>Islanding Capability</p>	<p>It refers to the GFM Interconnector capability to form the AC network Voltage at the Grid Connection Point and sustain local loads or generation (passive and/or active) connected to an islanded part of network after its disconnection from the main Transmission System (such as last feeder trip).</p>
<p>Re-synchronisation Capability</p>	<p>It refers to the GFM Interconnector capability to smoothly synchronise from an islanded condition, with load and generation, to a live Transmission System and remain in GFM Mode.</p>
<p>Self-Synchronisation Capability</p>	<p>It refers to the GFM Interconnector Converter Station capability to generate and control an AC voltage waveform of specified magnitude and frequency independently from other generation sources, and to synchronise autonomously with the rest of the Transmission System.</p>
<p>Synchronising Active Power</p>	<p>It refers to the GFM Interconnector Converter Station capability to maintain constant internal voltage phase angle for a few milliseconds after a voltage phase angle jump Disturbance within the Transmission System. As a result, the GFM Plant provides an immediate Active Power response at the Grid Connection Point based on its Effective Impedance (z_{eff}).</p> <p>The Synchronising Active Power (ΔP) is calculated according to the following expression under the assumption of $r_{eff} \ll x_{eff}$ (i.e. $x_{eff} \approx z_{eff}$):</p> $\Delta P = \frac{v_{conv} v_{gcp}}{x_{eff}} \sin(\Delta \delta)$ <p>Where:</p>

	<ul style="list-style-type: none"> • ΔP is the Synchronising Active Power, defined as the immediate Active Power variation at the Grid Connection Point (p.u.). • v_{gcp}: is the Transmission System voltage magnitude at the Grid Connection Point (p.u.) • v_{conv}: is the Interconnector Converter Station internal voltage magnitude at nominal frequency (p.u.). • x_{eff}: is the GFM plant effective reactance at nominal frequency at the Grid Connection Point (p.u.) • $\Delta\delta$ is the Transmission System voltage phase angle jump at the Grid Connection Point (degree) ($\delta_{conv} - \delta_{gcp}$) <p>Note: Synchronising Active Power is also commonly referred to as “voltage phase angle jump response” or “instantaneous active power response”.</p>
Synthetic Inertia Contribution	<p>It refers to the GFM Interconnector Converter Station capability to limit transient Frequency deviations by immediately adjusting Active Power exchange with the Transmission System based on the Rate of Change of Frequency.</p> <p>The Synthetic Inertia Contribution (ΔP) is calculated according to the following expression: $\Delta P = -2H_{eq} \frac{1}{f_0} \frac{df}{dt}$</p> <p>Where:</p> <ul style="list-style-type: none"> • ΔP: is the Synthetic Inertia Contribution, defined as the immediate Active Power variation at the Grid Connection Point (p.u.) • $\frac{df}{dt}$: is the Rate of Change of Frequency (RoCoF) (Hz/s) • f_0: is the Transmission System nominal Frequency (50 Hz) • H_{eq}: is the equivalent inertia constant of the GFM Plant (MW.s/MVA) <p>Note: synthetic inertia shall be considered as <i>the prescribed electrical dynamic performance provided by an HVDC system at its Grid Connection Point with the purpose of emulating the equivalent dynamic effect of the inertia provided by a synchronous power-generating module.</i></p>
Voltage Balancing	<p>It refers to the GFM PPM or GFM Interconnector Converter Station capability to contribute to balance the three-phase AC network voltage waveforms in magnitude. A GFM Plant with Voltage Balancing capabilities operates as a passive sink for network voltage unbalances at the Grid Connection Point, permitting the immediate and permanent flow of negative sequence current to reduce the network voltage unbalance factor.</p>
Voltage Stiffness Contribution	<p>It refers to the GFM PPM or GFM Interconnector Converter Station capability to support and maintain the Transmission System Voltage magnitude. This feature results in an immediate Reactive Power response at the Grid Connection Point following a voltage magnitude variation within the Transmission System.</p> <p>The Voltage Stiffness Contribution (ΔQ) is calculated as follows:</p> $\Delta Q \approx -\frac{v_{conv}\Delta v_{gcp}}{x_{eff}}$ <p>Where:</p>

	<ul style="list-style-type: none"> • ΔQ: is the Voltage Stiffness Contribution, defined as the immediate Reactive Power variation at the Grid Connection Point (p.u.). • Δv_{gcp}: is the Transmission System voltage magnitude variation at the Grid Connection Point at nominal frequency (p.u.). • v_{conv}: is the Interconnector Converter Station internal voltage magnitude at nominal frequency (p.u.). • x_{eff}: is the GFM plant effective reactance at nominal frequency at the Grid Connection Point (p.u.).
Withstand Capability	It refers to the ability of the GFM Interconnector Converter Station to sustain dynamic Disturbances on the connected Transmission System and remain stable and controllable while its operating limits may be reached.

Green-line Version of Impacted Grid Code Section(s) - show proposed changes to text:

PC.A6 Interconnector Data Requirements

PC.A6.2. Interconnector Operating Characteristics and Registered Data

(v) Interconnector power electronic converter and control systems

- (h) If the Interconnector has **Grid Forming** capability, the following additional data shall be provided to the **TSO**:
- Positive and negative sequence **Effective Impedance (z_{eff})** and X/R ratio of the **Interconnector Converter Station**.
 - Equivalent Inertia Constant (H_{eq}).
 - Damping ratio.
 - Frequency-dependent impedance of the **Interconnector Converter Station** in the frequency range from 5 Hz to 2500 Hz for a representative number of operating points and control modes.

CC.7.5.13 GRID FORMING

CC.7.5.13.17 The conditions specified in this section of the **Grid Code** apply to **Interconnector Converter Stations** with **Grid Forming** capability including those operated in **Interconnector STATCOM State**, unless otherwise specified.

CC.7.5.13.18 The conditions specified in this section of the **Grid Code** are in addition to those specified in CC.7.5.1 to CC.7.5.12 for **HVDC Units**, excluding the clauses listed below. The equivalent clause applicable to **Grid Forming** are included between brackets for clarity:

- CC.7.5.9.5(a) does not apply for **Grid Forming** (CC.7.5.13.13 applies for **Grid Forming**)
- CC.7.5.12.5 does not apply for **Grid Forming** (CC.7.5.13.12.2 for **Grid Forming**)
- CC.7.5.12.6 does not apply for **Grid Forming** (CC.7.5.13.12.3 for **Grid Forming**)

CC.7.5.13.19 The **Interconnector Converter Station(s)** shall have the capability to remotely enable/disable the **GFM Mode** upon **TSO** request. The details of this functionality will be provided by the **TSO**. When the **GFM Mode** is disabled in all **Interconnector Converter Stations**, all clauses from CC.7.5.1 to CC.7.5.12 will apply to the **Interconnector** instead of CC.7.5.13.

CC.7.5.13.20 The conditions specified in this section of the **Grid Code** apply at the **Grid Connection Point** of the **Interconnector Converter Station**, unless otherwise specified.

CC.7.5.13.21 The performance requirements specified in CC.7.5.13.8, CC.7.5.13.9 and CC.7.5.13.10 shall be met within the **Interconnector** current and energy limits for any operating point within the U-Q/Pmax profile defined in CC.7.5.10.d, voltage ranges defined in CC.7.5.1.1 (v), frequency ranges defined in CC.7.5.1.1 (t), and short circuit capacity (in MVA) at each **Connection Point** provided by the **TSO** in accordance with CC.7.5.12.1.

For weak system strength conditions, below the minimum short circuit capacity (in MVA) at the **Grid Connection Point** provided by the **TSO** in accordance with CC.7.5.12.1, including islanded operation, the **Interconnector** performance may deviate from the conditions specified in this section of the Grid Code but the **Interconnector Converter Station** shall be capable of stable operation within the ranges defined in CC.7.5.1.1(t) and CC.7.5.1.1(v).

CC.7.5.13.22 The performance requirements specified in CC.7.5.13.8, CC.7.5.13.9 and CC.7.5.13.10 shall be met for any initial operating point within the U-Q/Pmax profile defined in CC.7.5.10.d, for the following **Transmission System Disturbances** and during **Network** topology changes:

- A voltage phase angle jump of $\pm 10^\circ$ applied within the **Transmission System**.
- A voltage magnitude jump of ± 0.1 p.u. applied within the **Transmission System**, provided that the final expected operating point is within the U-Q/Pmax profile.
- A **ROCOF** of 1Hz/s for a duration 1s, provided that the sum of initial operating point and expected **Synthetic Inertia Contribution** remain within the U-Q/Pmax profile.

The response to the above **Disturbances** shall be provided within the **Interconnector Converter Station** or **Interconnector** available headroom. Reduced performance is acceptable when the **Interconnector Converter Station** or **Interconnector** limits are reached. For the avoidance of doubt, the **Interconnector** is not required to reserve any headroom.

CC.7.5.13.23 The **Active Power** response resulting from **GFM** behaviour at the remote end **Interconnector Converter Station** caused by a **Disturbance** as observed at their **Grid Connection Point**, shall not cause larger **Active Power** variation on the other **Interconnector Converter Station(s)** than the Active Power response as seen at the remote end **Interconnector Converter Station**.

CC.7.5.13.24 **Voltage Source Behaviour**

CC.7.5.13.8.7. Within the **Interconnector** voltage, current and energy limits, the **Interconnector Converter Station** shall be capable of behaving as a controllable voltage source behind an internal impedance (i.e. a Thevenin source) during both the normal operation and immediately after a grid **Disturbance**. The Thevenin source is characterized by its constant internal voltage amplitude, voltage phase angle, frequency, and internal impedance.

After the first instants of the **Disturbance**, the parameters of the Thevenin voltage source can change to support the secure operation of the **Transmission System**.

CC.7.5.13.8.8. The **Interconnector** shall actively contribute to the generation of the AC voltage waveforms, by providing **Synchronising Active Power** and **Voltage Stiffness**, within the **Interconnector** current and energy limits, immediately after a voltage **Disturbance** (phase angle or/and magnitude) in the **Transmission System**. The **Interconnector Converter Stations** shall emulate a Thevenin source behind an impedance as immediate response to a **Transmission System Disturbance**. The dynamic behaviour is described in CC.7.5.13.8.4 and CC.7.5.13.8.5.

CC.7.5.13.8.9. The **Interconnector Converter Station** effective positive and negative sequence impedances (without current limitation) shall be within the range of [0.2 to 0.5] in per unit, with a minimum X/R ratio of 10. The selected final value shall be communicated to the **TSO**.

The **Interconnector Converter Station** effective impedance, in positive and negative sequences, is defined in per unit as:

$$z_{eff\ pu} = \frac{z_{eff\ SI}}{Z_{base}}$$

$$z_{eff\ SI} = \sqrt{x_{eff\ SI}^2 + r_{eff\ SI}^2}$$

$$Z_{base} = \frac{V_{base}^2}{S_{base}}$$

$$S_{base} = \sqrt{P_{base}^2 + Q_{base}^2}$$

Where:

- $Z_{eff\ SI}$ is the **Interconnector Converter Station** effective impedance at the nominal **Transmission System** frequency, seen from the **Grid Connection Point** in Ohms (Ω). It includes the aggregate of physical equipment impedances such as cables, transformers and filters, and the virtual impedance from the control.
- $x_{eff\ SI}$ is the **Interconnector Converter Station** effective reactance at the nominal **Transmission System** frequency, seen from the **Grid Connection Point** in Ohms (Ω). It includes the aggregate of physical equipment reactances such as cables, transformers and filters, and the virtual reactance from the control.
- $r_{eff\ SI}$ is the **Interconnector Converter Station** effective resistance at the nominal **Transmission System** frequency, seen from the **Grid Connection Point** in Ohm. It includes the aggregate of physical equipment resistances such as cables, transformers and filters, and the virtual resistance from the control.
- V_{base} is nominal phase to phase RMS voltage in kV of the **Interconnector Grid Connection Point**.
- S_{base} is the base MVA power of the **Interconnector**.
- P_{base} is the **Interconnector Registered Capacity** in MW.
- Q_{base} is the maximum absolute value of **Reactive Power** capability, in either consumption (Import/lead) or production (Export/lag), of the **Interconnector Converter Station** in Mvar, as defined in CC.7.5.10.

CC.7.5.13.8.10. The **Interconnector** shall have the capability to provide **Synchronising Active Power**. This means that, following a voltage phase angle jump within the **Transmission System**, the **Interconnector** shall react immediately by varying its **Active Power** at the **Grid Connection Point**, within its current and energy limits, in a manner that counteracts the **Disturbance**, with an amplitude that depends on the network and converter impedances. Considering the measurement bandwidth and the dynamics of converter internal quantity limitations, the immediate **Active Power** response shall be observed within 5 ms to 20 ms of the voltage phase angle jump occurrence (measurements shall be done in compliance with IEC 61400-21-1).

For **Interconnectors** with at least two **Interconnector Converter Stations** in **GFM mode**, or for **Interconnector STATCOM State**, the capability to provide **Synchronising Active Power** for a voltage phase angle jump within the **Transmission System** may be limited by its inherent energy buffer. The **Interconnector Owner** shall agree the expected **Synchronising Active Power** with the **TSO**.

CC.7.5.13.8.11. The **Interconnector** shall have the capability to provide **Voltage Stiffness**. This means that, following a positive sequence voltage magnitude jump within the **Transmission System**, the **Interconnector** shall react immediately by varying its **Reactive Power** at the **Grid Connection Point**, within its current and energy limits, in a manner that counteracts the **Disturbance**, with an amplitude that depends on the network and converter impedances. Considering the measurement bandwidth and the dynamics of converter internal quantity limitations, the immediate **Reactive Power** response shall be observed within 5 ms to 20ms of the voltage magnitude jump occurrence (measurements shall be done in compliance with IEC 61400-21-1).

CC.7.5.13.8.12. The **Interconnector Converter Stations** shall have the capability to provide **Self-synchronisation**.

CC.7.5.13.25 **Synthetic Inertia Contribution**

CC.7.5.13.9.3 The **Interconnector** shall have the capability to provide **Synthetic Inertia Contribution** for high and low frequency conditions, within its current and energy limits, with an equivalent inertia constant (H_{eq}) of at least 3MW / MVA.. The **Synthetic Inertia Contribution** shall be provided

without delay. This means that, during ROCOF up to ± 1 Hz/s within the **Transmission System**, the **Interconnector** shall immediately adjust the **Active Power** transfer at the **Grid Connection Point**, within its current and energy limits, proportionally to the ROCOF experienced the **Grid Connection Point** such as:

$$\Delta P_{pu} = -2H_{eq} \frac{1}{f_0} \times ROCOF$$

For **Interconnectors** with at least two **Interconnector Converter Stations** in **GFM mode**, or for **Interconnector STATCOM State**, the capability to provide **Synthetic Inertia Contribution** may be limited. The **Interconnector Owner** shall agree the expected **Synthetic Inertia Contribution** with the **TSO**.

The **Interconnector Owner** shall agree the value of the equivalent inertia (H_{eq}) with the **TSO**, even if it is below the specified value or effective only for a limited duration.

CC.7.5.13.9.4 The **Synthetic Inertia Contribution** shall be provided with a damped system response and the **Active Power** transfer at the **Connection Point** shall smoothly return to its reference value with a damping ratio ξ of 0.4 or higher.

CC.7.5.13.26 **Expected Behaviour when reaching Current Capability Limits**

CC.7.5.13.10.4. If the **GFM** response of the **Interconnector** exceeds the **Interconnector Converter Station** capability limit, current limitation can be implemented. The response to changes in voltage phase angle, amplitude and/or frequency shall be equivalent to that of a voltage source (or a synchronous generator), except that the current magnitude may be limited as specified in CC.7.5.13.10.2. Under such conditions, the **Interconnector** shall remain stable and ensure a smooth, bump-less transition without interruption, operating continuously. The **Interconnector Converter Station** current limitation shall not lead to a switch of control mode. As soon as **Transmission System** conditions permit, the **Interconnector Converter Station** shall return to its normal operating capability (without current limitation) with a smooth, bump-less transition.

CC.7.5.13.10.5. During a **Voltage Dip** requiring current limitation, the **Interconnector Converter Station** shall limit its output current by reducing the magnitude of the current phasor only, while preserving its phase angle, such that the total magnitude complies with the **Interconnector Converter Station** current limit.

The unsaturated fault current is defined as the theoretical current delivered by an equivalent constant voltage source behind an impedance (without current limitations) when subjected to a fault on the **Transmission System** that produces the same voltage dip at the **Grid Connection Point**. The unsaturated fault current is calculated as follows:

$$I_{sc-unsat} = \frac{V_{conv} \cdot V_{gcp}}{Z_{Eff}} \quad [\text{p.u.}]$$

Where:

- $I_{sc-unsat}$: is the unsaturated (unlimited) short circuit current contribution from the **Interconnector Converter Station** (p.u.).
- Z_{eff} : is the **Interconnector Converter Station** effective impedance at the **Grid Connection Point** (p.u.)
- v_{conv} : is the **Interconnector Converter Station** internal voltage magnitude prior to (and in the first instants of) the voltage dip (p.u.)
- v_{gcp} : is the retained voltage magnitude at the **Grid Connection Point** during the **Voltage Dip** (p.u.)

The required **Interconnector Converter Station** output current limitation is illustrated in Figure CC.7.5.13.10. For the avoidance of doubt, the expected response during current limitation is the saturated fault current I_{sc-sat} .

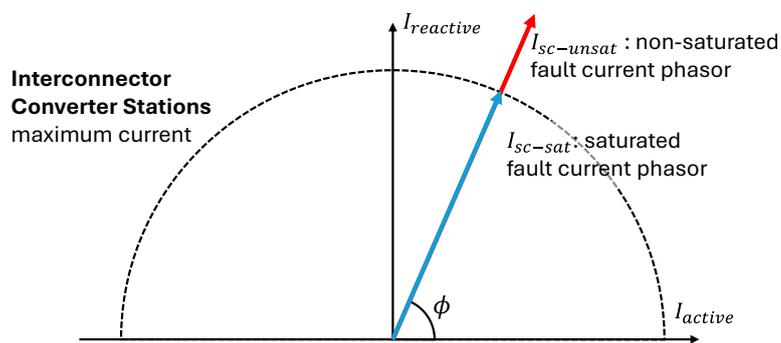


Figure CC.7.5.13.10: Illustration of GFM Current limitation

CC.7.5.13.10.6. When the **Transmission System** voltage magnitude and/or voltage phase angle recovers towards the pre-**Disturbance** grid conditions, the **Interconnector Converter Station** shall react with an instantaneous reduction of current, once the unlimited voltage source behaviour results in a current below the **Interconnector Converter Station** capability limits.

CC.7.5.13.27 **GFM Withstand Capability**

CC.7.5.13.11.3 The **Interconnector** shall have **withstand capabilities** for the Transmission System conditions defined in CC.7.5.1.1 and below:

- Phase-angle jump at the **Grid Connection Point** up to $\pm 30^\circ$.
- Any sudden **Transmission System** topology change under the range of short circuit power (in MVA) and network characteristics specified by the **TSO** in CC.7.5.1.1(x).

Under these conditions at the **Grid Connection Point**, the **Interconnector Converter Station** shall remain connected to the **Transmission System** and operate in a stable and controllable manner while **Interconnector's** operational limits (such as voltage, current and/or energy) may be reached. However, the **Interconnector** shall not introduce oscillations in the **Transmission System** and shall not trip or block, even temporarily.

CC.7.5.13.11.4 It is accepted that the **GFM** performance requirements specified in CC.7.5.13.8, CC.7.5.13.9 and CC.7.5.13.10 may be compromised for **Disturbance** levels at the **Grid Connection Point** between the limits defined in CC.7.5.13.6 (performance limits) and CC.7.5.13.11.1 (withstand limits). The **Interconnector Owner** shall communicate to the **TSO** any reduced performance capability in this operating range.

CC.7.5.13.28 **Fault Ride Through**

CC.7.5.13.12.5. The **Interconnector Converter Stations** shall provide immediate and inherent voltage support, according to the **Interconnector Converter Station Effective Impedance** defined in CC.7.5.13.8.3, during symmetric and asymmetric **Voltage Dips** as defined in CC.7.5.12.1. If this voltage support requires output current limitations, it shall be performed according to the principles defined in CC.7.5.13.10.

CC.7.5.13.12.6. During **Voltage Dips**, no priority shall be given to any current component, whether active or reactive, positive sequence or negative sequence.

CC.7.5.13.12.7. After a **Voltage Dip**, the **Interconnector** shall reach its **Active Power** set-point as quickly as the **GFM Mode** allows, considering dependencies with the selected equivalent inertia constant

(H_{eq}), and in any event the **Interconnector** shall provide at least 50% and 90% of its **Active Power** set-point within 500 ms and 1.5 seconds, respectively, of the **Transmission System Voltage** recovering to 90% of nominal **Voltage**. This requirement does not apply to **Interconnector STATCOM State**.

CC.7.5.13.12.8. At **Fault Disturbance** clearance, the **Interconnector Converter Station** shall support the **Transmission System** voltage recovery by providing **Reactive Power** but shall not contribute to voltage overshoot by more than 5% of pre-fault voltage.

CC.7.5.13.29 The speed of response of the **Voltage Regulation System** shall be such that, following a step change in **Voltage** at the **Connection Point** the **Interconnector Converter Station** shall achieve 90 % of its steady-state **Reactive Power** response within 3 seconds. The **Reactive Power** shall settle at the steady-state **Reactive Power** response within 10 seconds, with a steady-state **Reactive Power** tolerance no greater than 5 % of the maximum **Reactive Power**.

Subject to agreement with **TSO**, the **Voltage Regulation Set-point** may be operated with or without a deadband selectable in a range from zero to $\pm 5\%$ of reference 1 p.u. **Transmission System Voltage**, with continuous setting.

Voltage Regulation Set-point shall include the capability to change **Reactive Power** output based on a combination of a modified set-point **Voltage** and an additional instructed **Reactive Power** component. The **TSO** will specify a slope with a range and step on a site-specific basis.


CC.7.5.13.30 The **Interconnector** may have the capability to provide **Voltage Balancing**. If this capability is provided, the **Interconnector Converter Station** shall behave as a pure positive sequence voltage source behind the equivalent impedance as defined in CC.7.5.13.8.3. The negative-sequence current shall vary linearly with the magnitude of the negative-sequence voltage no less than 3% negative-sequence current of the nominal current.

CC.7.5.13.31 The **Interconnector** may provide **Islanding Capability** and **Re-synchronisation Capability**, as agreed with the **TSO**. The conditions and parameters of these capabilities shall be agreed with the **TSO**.

CC.7.5.13.32 The **Interconnector** may provide **Black Start Capability**. If this capability is provided, the **Black Start Station** shall be able to remain in **GFM Mode** with no change of control mode. The **Black Start** requirements defined in OC.4.7 remain applicable.

Definitions

Effective Impedance (Z_{eff})	This is the GFM Interconnector Converter Station impedance observed at the Grid Connection Point at nominal frequency. For clarity, this effective impedance includes the aggregate of all physical impedances such as transformer, cables and converter impedance, and the virtual impedance from the control at nominal frequency. The Effective Impedance (Z_{eff}) is illustrated in the following equivalent circuit representation:
---	--

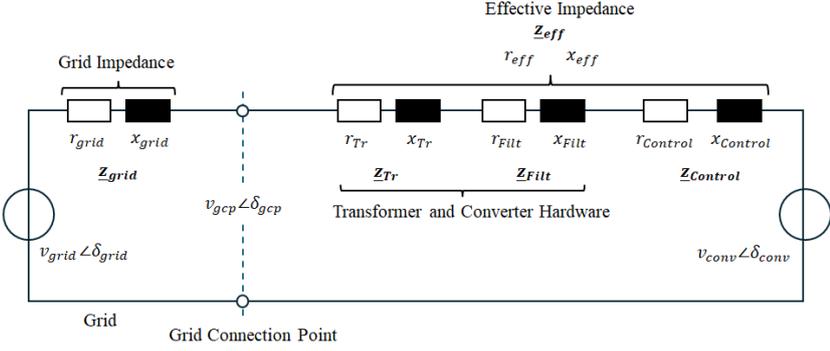	 <p style="text-align: center;">Effective Impedance Z_{eff} $r_{eff} \quad x_{eff}$</p> <p style="text-align: center;">Grid Impedance $r_{grid} \quad x_{grid}$ Z_{grid}</p> <p style="text-align: center;">Transformer and Converter Hardware $r_{Tr} \quad x_{Tr}$ Z_{Tr} $r_{Filt} \quad x_{Filt}$ Z_{Filt} $r_{Control} \quad x_{Control}$ $Z_{Control}$</p> <p style="text-align: center;">Grid $v_{grid} \angle \delta_{grid}$</p> <p style="text-align: center;">Grid Connection Point $v_{gcp} \angle \delta_{gcp}$</p> <p style="text-align: right;">$v_{conv} \angle \delta_{conv}$</p>
Grid-Forming (GFM)	The expected requirement for Interconnector with GFM characteristics is for it to be capable of appearing at the Grid Connection Point as a passive source such that, following a Disturbance , it results in the injection of current, within its current capability limits, in the sub-transient and transient frame (sub-cycle up to tens of cycles) in a manner that helps oppose the impact of the Disturbance .
Grid-Forming (GFM) Mode	Control mode of a Interconnector Converter Station which corresponds to and fulfils the GFM functional requirements as specified in this Grid Code .
Interconnector STATCOM State	A specific state of an Interconnector Converter Station , which is DC islanded from the other Interconnector Converter Station(s) , with or without the DC transmission lines or cable connected to it.
Islanding Capability	It refers to the GFM Interconnector capability to form the AC network Voltage at the Grid Connection Point and sustain local loads or generation (passive and/or active) connected to an islanded part of network after its disconnection from the main Transmission System (such as last feeder trip).
Re-synchronisation Capability	It refers to the GFM Interconnector capability to smoothly synchronise from an islanded condition, with load and generation, to a live Transmission System and remain in GFM Mode .
Self-Synchronisation Capability	It refers to the GFM Interconnector Converter Station capability to generate and control an AC voltage waveform of specified magnitude and frequency independently from other generation sources, and to synchronise autonomously with the rest of the Transmission System .
Synchronising Active Power	<p>It refers to the GFM Interconnector Converter Station capability to maintain constant internal voltage phase angle for a few milliseconds after a voltage phase angle jump Disturbance within the Transmission System. As a result, the GFM Plant provides an immediate Active Power response at the Grid Connection Point based on its Effective Impedance (Z_{eff}).</p> <p>The Synchronising Active Power (ΔP) is calculated according to the following expression under the assumption of $r_{Eff} \ll x_{Eff}$ (i.e. $x_{Eff} \approx Z_{Eff}$):</p> $\Delta P = \frac{v_{conv} v_{gcp}}{x_{eff}} \sin(\Delta \delta)$ <p>Where:</p> <ul style="list-style-type: none"> • ΔP is the Synchronising Active Power, defined as the immediate Active Power variation at the Grid Connection Point (p.u.). • v_{gcp}: is the Transmission System voltage magnitude at the Grid Connection Point (p.u.) • v_{conv}: is the Interconnector Converter Station internal voltage magnitude at nominal frequency (p.u.).

	<ul style="list-style-type: none"> • x_{eff}: is the GFM plant effective reactance at nominal frequency at the Grid Connection Point (p.u.) • $\Delta\delta$ is the Transmission System voltage phase angle jump at the Grid Connection Point (degree) ($\delta_{conv} - \delta_{gcp}$) <p>Note: Synchronising Active Power is also commonly referred to as “voltage phase angle jump response” or “instantaneous active power response”.</p>
Synthetic Inertia Contribution	<p>It refers to the GFM Interconnector Converter Station capability to limit transient Frequency deviations by immediately adjusting Active Power exchange with the Transmission System based on the Rate of Change of Frequency.</p> <p>The Synthetic Inertia Contribution (ΔP) is calculated according to the following expression: $\Delta P = -2H_{eq} \frac{1}{f_0} \frac{df}{dt}$</p> <p>Where:</p> <ul style="list-style-type: none"> • ΔP: is the Synthetic Inertia Contribution, defined as the immediate Active Power variation at the Grid Connection Point (p.u.) • $\frac{df}{dt}$: is the Rate of Change of Frequency (RoCoF) (Hz/s) • f_0: is the Transmission System nominal Frequency (50 Hz) • H_{eq}: is the equivalent inertia constant of the GFM Plant (MW.s/MVA) <p>Note: synthetic inertia shall be considered as <i>the prescribed electrical dynamic performance provided by an HVDC system at its Grid Connection Point with the purpose of emulating the equivalent dynamic effect of the inertia provided by a synchronous power-generating module.</i></p>
Voltage Balancing	<p>It refers to the GFM PPM or GFM Interconnector Converter Station capability to contribute to balance the three-phase AC network voltage waveforms in magnitude. A GFM Plant with Voltage Balancing capabilities operates as a passive sink for network voltage unbalances at the Grid Connection Point, permitting the immediate and permanent flow of negative sequence current to reduce the network voltage unbalance factor.</p>
Voltage Stiffness Contribution	<p>It refers to the GFM PPM or GFM Interconnector Converter Station capability to support and maintain the Transmission System Voltage magnitude. This feature results in an immediate Reactive Power response at the Grid Connection Point following a voltage magnitude variation within the Transmission System.</p> <p>The Voltage Stiffness Contribution (ΔQ) is calculated as follows:</p> $\Delta Q \approx -\frac{v_{conv}\Delta v_{gcp}}{x_{eff}}$ <p>Where:</p> <ul style="list-style-type: none"> • ΔQ: is the Voltage Stiffness Contribution, defined as the immediate Reactive Power variation at the Grid Connection Point (p.u.). • Δv_{gcp}: is the Transmission System voltage magnitude variation at the Grid Connection Point at nominal frequency(p.u.). • v_{conv}: is the Interconnector Converter Station internal voltage magnitude at nominal frequency (p.u.).

	<ul style="list-style-type: none">• x_{eff}: is the GFM plant effective reactance at nominal frequency at the Grid Connection Point (p.u.).
Withstand Capability	It refers to the ability of the GFM Interconnector Converter Station to sustain dynamic Disturbances on the connected Transmission System and remain stable and controllable while its operating limits may be reached.