MODIFICATION PROPOSAL FORM



160 SHELBOURNE ROAD BALLSBRIDGE DUBLIN 4

PH: +353-1-677 1700 FAX: +353-1-6615375

EMAIL: GRIDCODE@EIRGRID.COM

FORM GC1, PROPOSAL OF MODIFICATION TO GRID CODE.

MODIFICATION PROPOSAL ORGINATOR:	EirGrid				
MODIFICATION PROPOSAL ORIGINATOR (CONTACT NAME)	Séamus Power		MODIFICATION PROPOSAL ORIGINATOR FAX NUMBER:	01 2370043	
MODIFICATION PROPOSAL ORIGINATOR TELEPHONE NUMBER:	01 2370522		DATE:	02/01/2013	
MODIFICATION PROPOSAL ORIGINATOR E-MAIL ADDRESS:	seamus.power@eirgrid.		MODIFICATION PROPOSAL NUMBER (EIRGRID USE ONLY)	MPID240	
GRID CODE SECTION(S) AFFECTED BY PROPOSAL:		All sections			
GRID CODE VERSION:		4.0			
MODIFICATION PROPOSAL DESCRIPTION (MUST CLEARLY STATE THE DESIRED AMENDMENT, ALL TEXT/FORMULA CHANGES TO THE GRID CODE. THE REQUIRED REASON FOR THE MODIFICATION MUST STATED. ATTACH ANY FURTHER INFORMATION IF NECESSARY.)		Following the processing of two Demand Side Unit applications and six months operation of a Demand Side Unit, a review of the Grid Code with respect to Demand Side Units was performed. Much of this modification is house-keeping/tidy-up. It was decided to rename the operator of a Demand Side Unit from "Dispatchable Demand Customer" to "Demand Side Unit Operator". The Planning Code Appendix has been updated with the data requested in the Demand Side Unit Application Form. The most significant changes are those contained in CC.7.4 regarding Demand Side Unit MW Response Time and Minimum off time and CC.12.6 regarding the specification of the method of aggregation. Please note that changes to the Distribution Code may also be required.			
IMPLICATION OF NOT IMPLEMENTING THE MODIFICATION		The system operational benefits of Demand Side Units will be reduced if this modification is not implemented.			
Please submit the Modificat	tion Proposal	by fax, post or	electronically, using the infor	mation supplied above	
EIRGRID REVIEWER					

EIRGRID ASSESSMENT	As Demand Side Units continue to evolve and grow, there will be a
	requirement to review the Grid Code periodically so to ensure that the
	technical operational responses from Demand Side Units will not
	unduly affect the System (including the smoothness of its ramp up and
	ramp down). The introduction of tolerances depending on the makeup
	of the DSU may be required.

PC.3 SCOPE

The **Planning Code** applies to the **TSO** and to the following **Users:**

- (a) **Generators** and **Generator Aggregators** with **Registered Capacity** greater than 10 MW;
- (b) all **Generators** connected to the **Transmission System**;
- (c) Interconnector Operators;
- (d) Transmission Asset Owner; and
- (e) Demand Customers; and Demand Side Units.
- (f) **Demand Side Unit Operators.**

The above categories of **User** will become bound by the **Planning Code** prior to generating, distributing or consuming electricity, as the case may be, and references to the various categories (or to the general category) of **User** should, therefore, be taken as referring to a prospective **User** in that role as well as to **Users** actually connected.

GRID CODE - PLANNING CODE APPENDIX

INTRODUCTION

This appendix specifies data to be submitted to the **TSO** by **Users** or prospective **Users** of the **Transmission System**. The requirement to provide data is governed by the Planning Code (PC4.2, PC4.3, PC4.4, PC5 and PC6).

The specific data requirements depend on whether the **User** is a **Customer** or a **Generator** or **Interconnector** or a **Demand Side Unit Operator** or more than one combined. PC.A1 and PC.A2 apply to all **Users**. PC.A3 applies to demand **Users**. PC.A4 applies to **Generators**. PC.A5 applies to **Interconnectors** and PC.A6 applies to **Demand Side Unit Operators Dispatchable Demand Customers**.

Any material changes to the data specified in PC.A3, PC.A4 or PC.A6or PC.A4 must be notified to the **TSO** as soon as practicable.

PC.A2.3.1 Licence:

Details of any **Generation** or **Interconnector** or **Supply Licence** held by the applicant, or of any application for a **Generation** or **Interconnector** or **Supply Licence**.

PC.A6: Demand Side Unit Operators

For each **Demand Side Unit Operator**, the following information shall be provided:

- (a) General Details
 - (i) name of **Demand Side Unit**;
 - (ii) address of the **Demand Side Unit Control Facility**;
 - (iii) address of each Individual Demand Site(s) comprising the Demand Side Unit;
 - (iv) Irish Grid Co-ordinates of the Connection Point of each IndividualDemand Site comprising the Demand Side Unit;
 - (v) Meter Point Reference Number for each Individual Demand Site comprising the Demand Side Unit;
 - (vi) the name of the Transmission Station(s) to which each Individual Demand Site comprising the Demand Side Unit is/are normally connected;
 - (vii) single line diagram for each **Individual Demand Site**;
 - (viii) details of all Generation Units used as part of the Demand Side Unit, including the Capacity, the MVA rating, fuel type, and whether it will be used as a standby plant;
 - details of all **Demand** loads with **Demand** reduction capability of 5
 MW or greater, including size in MW and demand reduction capability from load;
 - (x) Maximum Import Capacity of each Individual Demand Site comprising the Demand Side Unit (MW);
 - (xi) Maximum Export Capacity of each Individual Demand Site comprising the Demand Side Unit (MW);
 - (xii) proof of a valid Connection Agreement for each Demand
 Customer and proof of a valid DSO Connection Agreement for
 each DSO Demand Customer that comprises the Demand Side
 Unit clearly showing Maximum Import Capacity and Maximum
 Export Capacity (if applicable);
 - (xiii) whether the **Distribution System Operator** has been informed about the intention of the **Demand Side Unit Operator** to operate a

- **Demand Side Unit** (the **Demand Side Unit Operator** is obliged to inform the **Distribution System Operator**);
- (xiv) details of any special operating or network limitations placed by the **Distribution System Operator** on the **Demand Side Unit**;
- (xv) details of restrictions to the Operation of Individual Demand Sites comprising the Demand Side Unit (e.g. EPA Licence or planning conditions);
- (xvi) confirmation that all Individual Demand Sites comprising the Demand Side Unit are not currently registered or shall not be registered as or part of any Aggregated Generator Unit or other Demand Side Unit:
- (xvii) whether any Individual Demand Site comprising the Demand SideUnit participates in any demand side management schemes;
- (xviii) annual **Demand Side Unit MW Capacity** profile of the **Demand Side Unit** for each **Trading Period** of the year;
- (xix) annual **Demand Side Unit Energy Profile** of the **Demand Side Unit** for each **Trading Period** of the year;
- (xx) annual Demand Side Unit Energy Profile of each Individual Demand Site comprising the Demand Side Unit for each Trading Period of the year;
- (xxi) detailed specification of the **Demand Side Unit** control system and method of aggregation, and the communications systems that will be in place between the **Demand Side Unit Control Facility** and the **Individual Demand Sites**;
- (xxii) project milestones;
- (xxiii) proposed effective date in Single Electricity Market; and
- (xxiv) proposed date for **Grid Code Testing**.

(b) Technical Details

- (i) total Demand Side Unit MW Capacity (MW) of the Demand Side Unit;
- (ii) Demand Side Unit MW Capacity (MW) of each Individual Demand Site comprising the Demand Side Unit;
- (iii) total Demand Side Unit MW Capacity of the Demand Side Unit available from on-site Generation (MW);
- (iv) Demand Side Unit MW Capacity of each Individual Demand Site comprising the Demand Side Unit available from on-site Generation (MW);
- (v) total **Demand Side Unit MW Capacity** of the **Demand Side Unit** available from avoided **Demand** consumption (**MW**);

- (vi) Demand Side Unit MW Capacity of each Individual Demand Site comprising the Demand Side Unit available from avoided Demand consumption (MW);
- (vii) Demand Side Unit MW Response Time of the Demand Side Unit;
- (viii) Demand Side Unit MW Response Time of each Individual Demand Site comprising the Demand Side Unit;
- (ix) Minimum Down Time of the Demand Side Unit;
- (x) Minimum Down Time of each Individual Demand Site comprising the Demand Side Unit;
- (xi) Maximum Down Time of the Demand Side Unit;
- (xii) Maximum Down Time of each Individual Demand Site comprising the Demand Side Unit:
- (xiii) Minimum off time of the Demand Side Unit;
- (xiv) Minimum off time of each Individual Demand Site comprising the Demand Side Unit;
- (xv) Maximum Ramp Up Rate of the Demand Side Unit;
- (xvi) Maximum Ramp Up Rate of each Individual Demand Site comprising the Demand Side Unit;
- (xvii) Maximum Ramp Down Rate of the Demand Side Unit;
- (xviii) Maximum Ramp Down Rate of each Individual Demand Site comprising the Demand Side Unit;

PC.A6: Dispatchable Demand Customers

For each **Dispatchable Demand Customer**, the following information shall be provided:

- (a) name of **Demand Side Unit**;
- (b) location of **Demand Site(s)**;
- (c) the name of the Transmission Station(s) to which the Demand Site(s) is/are normally connected:
- (d) total Demand Side Unit MW Capacity (MW);
- (e) Demand Side Unit MW Capacity available from on-site Generation (MW);
- (f) Demand Side Unit MW Capacity available from avoided Demand consumption (MW);
- (g) annual Demand Side Unit Energy Profile.

For each Dispatchable Demand Customer which represents an Aggregated Demand Site, the following additional information shall be provided:

- (h) Demand Side Unit MW Capacity per Individual Demand Site (MW);
- (i) Demand Side Unit MW Capacity from Generation per Individual Demand Site (MW);;

- (j) Demand Side Unit MW Capacity from avoided Demand consumption per Individual Demand Site (MW);
- (k) Demand Side Unit Export Capacity per Individual Demand Site (MW);
- (I) Demand Side Unit Import Capacity per Individual Demand Site (MW);
- (m) annual Demand Side Unit Energy Profile per Individual Demand Site (MW).

CC.3 SCOPE

The **Connection Conditions** apply to the **TSO** and to the following **Users**:

- (a) Generators with Registered Capacity greater than 2MW;
- (b) Interconnectors;
- (c) **Demand Customers**; and
- (d) **Demand Side Unit Operators Dispatchable Demand Customers**.


in relation to their connection to the Transmission System.

CC.7.4 Each **Demand Side Unit** shall, as a minimum, have the following capabilities:

- (a) Able to provide **Demand Side Unit MW Response** between 0 MW and the
 Demand Side Unit MW Capacity;
- (b) Maximum Ramp Up Rate not less than 4.51.67% per minute of Demand Side Unit MW Response as specified in the Dispatch Instruction. Capacity per minute when the Demand Side Unit is in Normal Dispatch Condition;
- (c) Maximum Ramp Down Rate not less than 1.51.67% per minute of Demand Side Unit MW Response as specified in the Dispatch Instruction. Capacity per minute when the Demand Side Unit is in Normal Dispatch Condition;
- (d) Minimum Down -Time not greater than 30 minutes for Demand Side Units;
 and
- (e) Maximum Down- Time not less than 2 hours for Demand Side Units.;
- (f) **Minimum off time** not greater than 2 hours; and
- (g) **Demand Side Unit MW Response Time** of not greater than 1 hour.

On-site **Generation** that forms part of a **Demand Side Unit**Each **Demand Side Unit** with on-site **Generation**, shall, as a minimum, have the following capabilities:

- (fh) operate continuously at normal rated output at **Transmission System**Frequencies in the range 49.5Hz to 50.5Hz;
- (gi) remain synchronised to the **Transmission System** at **Transmission System Frequencies** within the range 47.5Hz to 52.0Hz for a duration of 60 minutes;
- (hj) remain synchronised to the **Transmission System** at **Transmission System Frequencies** within the range 47.0Hz to 47.5Hz for a duration of 20 seconds required each time the **Frequency** is below 47.5Hz; and
- (ik) remain synchronised to the **Transmission System** during a rate of change of **Transmission System Frequency** of values up to and including 0.5 Hz per second.

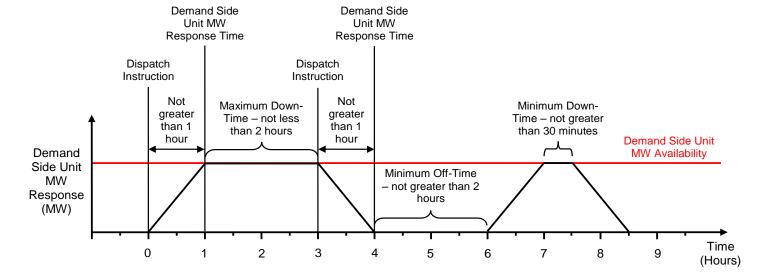

- CC.12.2 Signals and indications required to be provided by **Users** will include but shall not be limited to the following:
 - (a) LV switchgear positions pertinent to the status of each Grid Connected Transformer through a set of two potential free auxiliary contacts (one contact normally open and one contact normally closed when circuit breaker is open) for each circuit breaker;
 - (b) kV at transformer low Voltage terminals; and
 - (c) a minimum of four sets of normally open potential free auxiliary contacts in each transformer LV bay for fault indication.
 - (d), (e), (f), (g), (h) and (i) are applicable to **Generators** only
 - (d) MW and +/-Mvar at alternator terminals of each Generation Unit;
 - (e) kV at Generator Transformer LV terminals;

- (f) **Generator Transformer** tap position;
- (g) Measured or derived MW output on each fuel, from **Generation Units** that can continuously fire on more than one fuel simultaneously;
- (h) Where it is agreed between the TSO and the Generator that signals are not available on the HV terminals, +/- MW and +/- Mvar shall be provided at the Grid Connected Transformer low Voltage terminals; and
- (i) Remaining **Secondary Fuel** capability (where applicable) in MWh equivalent when running at **Registered Capacity**;

(j) and (k) are applicable to **Demand Customers** only

- (j) MW and +/- Mvar at the HV terminals of the Grid Connected Transformer;and
- (k) **Grid Connected Transformer** tap position.

(I), (m), (n), (o), (p), (q), (r) and (s) are applicable to **Demand Side Unit Operators** who represent a **Demand Side Unit**:

- (I) Demand Side Unit MW Response from Generation;
- (m) **Demand Side Unit MW Response** from avoided **Demand** consumption;
- (n) Remaining **Demand Side Unit MW Capacity**;
- (o) Demand Side Unit MW Response from each Demand load with a Demand
 Side Unit MW Capacity of greater than or equal to 5 MW;
- (p) MW Output from Generation Units with a Capacity greater than or equal to 5 MW:
- (q) Mvar Output from Generation Units with a Capacity greater than or equal to 5 MW at Individual Demand Sites with a Maximum Export Capacity specified in the Connection Agreement or DSO Connection Agreement as applicable, as required by the TSO;
- (r) MW Output from Generation Units on Individual Demand Sites with a combined Capacity of greater than or equal to 5 MW, as required by the TSO; and
- (s) **Demand Side Unit MW Response** from each **Individual Demand Site** that comprises the **Demand Side Unit**, as required by the TSO.

(I) and (m) are applicable to **Dispatchable Demand Customers** who represent a **Demand Side Unit**. For each **Individual Demand Site** (for the purposes of testing):

- (I) Measured or derived MW Output for each Generator at the Control Facility of the Dispatchable Demand Customer; and
- (m) Demand Side Unit MW Response at the Control Facility of the Dispatchable Demand Customer.

(n) and (o) are applicable to Dispatchable Demand Customers who represent a Demand Side Unit which consists on an Aggregated Demand Site:

- (n) The aggregated, measured or derived loss adjusted MW output for each Individual Demand Site, Control Facility of the Dispatchable Demand Customer; and
- (o) The aggregated Demand Side Unit MW Response aggregated at the HV Control Facility of the Dispatchable Demand Customer.
- $(\not pt)$, $(\not qu)$, $(\not rv)$, $(\not sw)$ and $(\not tx)$ are applicable to **Interconnectors** only:
- (pt) +/-MW and +/-Mvar at the high Voltage terminals of the Interconnector

 Transformer:
- (qu) kV at Interconnector Transformer high Voltage terminals;
- (FV) Interconnector Transformer tap position;
- (sw) Interconnector status; and
- (tx) Frequency.
- CC.12.6 Demand Side Unit Operators Dispatchable Demand Customers and Generator Aggregators shall provide the TSO the specification of the method of aggregation of SCADA from multiple sites. The minimum specifications shall be agreed with the TSO in advance and shall include:
 - (a) signals from Demand Side Unit Operators shall be relayed to the TSO Telecommunication Interface Cabinet which reflect the Demand Side Unit MW Response to an accuracy of within 1 MW of the actual Demand Side Unit MW Response within 15 seconds of change occurring to the Demand Side Unit MW Response; and
 - (b) a single failure of an item of the **Demand Side Unit Operator's** equipment will not result in:
 - (i) loss of control of more than one **Individual Demand Site**;
 - (ii) loss of **Demand Side Unit MW Response** of more than one **Individual Demand Site**: or
 - the Demand Side Unit MW Response from Generation or Demand Side Unit MW Response from avoided Demand consumption signals being incorrect by more than the Demand Side Unit MW Capacity of the Individual Demand Site with the highest Demand Side Unit MW Capacity comprising the Demand Side Unit.

OC2.1 INTRODUCTION

Secure operation of an electricity system requires that maintenance of production facilities (Generation Units, Interconnectors, Aggregated Generating Units and Demand Side Units) should be carried out in a timely and orderly fashion. This is essential in order to enable the TSO to fulfil its obligations relating to operation of the Transmission System, and to enable Generators, Interconnector Operators, Generator Aggregators or Demand Side Unit Operators Dispatchable Demand Customers to plan their Outages in an orderly way with due regard to Plant requirements and resource limitations. The mechanisms by which this is achieved are formalised in this Operational Planning Code (Generation).

OC2.2 OBJECTIVE

The primary objective of OC2 is to promote the development and implementation of a co-ordinated **Generation Outage Programme**, consistent with security of supply and requirements for the secure and economic operation of the **Transmission System** and the **Other Transmission System**, and with the needs of **Generators**, **Interconnector Operators**, **Generator Aggregators** or **Demand Side Unit Operators**Dispatchable Demand Customers in respect of **Plant** maintenance requirements and resource limitations.

In order to achieve this objective, OC2 defines:

- (a) the procedure for formal notification of Outages by Generators, Interconnector Operators, Generator Aggregators and Demand Side Unit Operators Dispatchable Demand Customers to the TSO;
- the procedures by which the Indicative, Provisional and Committed
 Outage Programmes are reviewed by the TSO, in consultation with
 Generators, Interconnector Operators, Generator Aggregators, or
 Demand Side Unit OperatorsDispatchable Demand Customers or
 Demand Side Aggregators;
- (c) the co-ordination of **Outage** planning and the interchange of **Outage** schedules with the **Other TSO**; and

- (d) the procedure for formal notification by **Generators**, **Generator Aggregators**, or **Demand Side Unit Operators Customers or Demand Side Aggregators** of:
 - (i) a decision to cancel a major **Outage** of a **Generating Unit**;
 - (ii) the findings during or following a major **Outage** of a **Generating Unit**:
 - (iii) an unexpected and unplanned failure of a Generating Unit.

OC2 shall apply to all proposed **Outages** that may affect the ability of a **Generation Unit, Interconnector, Aggregated Generating Unit** and **Demand Side Unit** to achieve, in accordance with its **Registered Operating Characteristics**, either its full **Registered Capacity**, appropriate to each **Registered Fuel**, **Interconnector Registered Capacity** or its **Demand Side Unit MW Capacity** as the case maybe.

OC2.7 also requires Generators, Interconnector Operators, Generator Aggregators and Demand Side Unit Operators Dispatchable Demand Customers to inform the TSO of other proposed maintenance of a Generation Unit, Interconnector, Aggregated Generating Unit, Demand Side Unit or any associated Plant or Apparatus, where such maintenance will affect the availability of Ancillary Services in respect of that Generation Unit.

OC2.3 SCOPE

Operational Planning applies to the **TSO** and to the following, each of which is a **User** under this OC2:

- (a) Generators which for the purposes of OC2 includes all Generators with Registered Capacity greater than 5 MW or which are subject to Central Dispatch;
- (b) Interconnector Operators;
- (c) Generator Aggregators;
- (d) Demand Side Unit Operators Dispatchable Demand Customers; and
- (e) The **Distribution System Operator (DSO)**.

- OC2.4.2 In rolling over the **Generation Outage Programme** from one year to the next, for every year except the first year of the planning process:
 - (a) submissions by the Generator, Interconnector Operator, Generator
 Aggregator and/or Demand Side Unit Operator Dispatchable Demand
 Customer for year 2 should reflect the current Provisional Outage
 Programme for year 3; and
 - (b) submissions by the Generator, Interconnector Operator, Generator Aggregator and/or Demand Side Unit Operator Dispatchable Demand Customer for year 1 should reflect the current Provisional Outage Programme for year 2.

except, in any such case, to the extent that the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer is reasonably responding to changed circumstances. This does not require Generators, Interconnector Operators, Generator Aggregators or Demand Side Unit Operators Dispatchable Demand Customers to explain changes unless required to do so by the TSO. The aggregate of all Generators' Outage Programmes is the Generation Outage Programme that will comprise the COP and POP.

- OC2.4.3 By the end of March in year 0, Generators, Generator Aggregators and Demand Side Unit Operators Dispatchable Demand Customers shall submit to the TSO, for each Generation Unit, Aggregated Generating Unit or Demand Side Unit, details of Outages and estimates of the Forced Outage Probabilities for inclusion in:
 - (a) the Committed Outage Programme (COP) for year 1. Other than in the first year after the planning process has commenced, this will be based on the previous year's Provisional Outage Programme for year 2, which period through the passage of time has now become year 1, and any changes may only reflect the Generator's, Interconnector Operator's, Generator Aggregator's, and Demand Side Unit Operator's Dispatchable Demand Customer's reasonable response to changed circumstances;
 - (b) the **Provisional Outage Programme (POP)** for years 2 and 3.

In the case of Aggregated Generating Units, and Demand Side Units which consist of Aggregated Demand Sites, the Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer shall provide the aggregated Outages, and upon request from the TSO the Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer shall provide the Outage for each individual site, in a reasonable time period.

Generators, Interconnector Operators, Generator Aggregators and Demand Side Unit Operators Dispatchable Demand Customers shall specify with regard to

each of their **Generation Units**, **Interconnector**, **Aggregated Generating Units** or **Demand Side Units**, the start date and time and the duration of each **Outage**.

- OC2.4.4 In scheduling Outages, and in relation to all other matters under OC2, the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer must act reasonably and in good faith. Without limitation to such obligation, each Generator, Interconnector Operator, Generator Aggregator and Demand Side Unit Operator Dispatchable Demand Customer should act in accordance with Good Industry Practice in planning their Outages and, in particular, so as to avoid a situation arising in which a Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer is obliged to schedule an Outage at short notice by reason of obligations imposed upon the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer by statute as a consequence of the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer not having planned in accordance with Good Industry Practice, for example, by not having planned sufficiently in advance its Outages for any statutory time limit.
- OC2.4.5 When submitting proposed **Outages** for inclusion in the **COP**, **POP** and **IOP**, **Generators**, **Interconnector Operators**, **Generator Aggregators** and **Demand Side Unit OperatorsDispatchable Demand Customers** shall, unless they reasonably substantiate that an **Outage** is inflexible, specify:
 - (a) an alternative preferred window, or alternative preferred windows, of opportunity within each year for any **Outage**;
 - (b) the minimum Outage duration which would be acceptable, if less than the scheduled Outage duration;
 - (c) situations where the paralleling of Outages of two or more of its Generation Units, Interconnectors, Aggregated Generating Units, Demand Side Units or Aggregated Demand Side Units may be required, desirable, undesirable or not possible;
 - (d) a priority order associated with the various Outages scheduled by the Generator, Interconnectors, Generator Aggregators and Demand Side Unit Operator Dispatchable Demand Customer;
 - (e) any Outages where it is particularly desirable that they should take place within the year scheduled; or
 - (f) any **Outage** where its timing is dependent on **Generation Unit** run hours, equivalent run hours or starts.

OC2.4.6 Generators, Interconnector Operators, Generator Aggregators, Demand Side Unit Operators Dispatchable Demand Customers are required to signal adequately in advance major Outages which could impact on capacity adequacy or on the TSO's transmission outage maintenance and development. In rolling over the Generation Outage Programme from one year to the next each Generator, Generator Aggregator and Demand Side Unit Operator Dispatchable Demand Customer shall not be constrained in making any submission by any previous Provisional Outage Programme.

- OC2.4.7 Between March and June of year 0, the **TSO** shall carry out a security analysis of years 1 to 7 in light of proposed **Outages** and other relevant matters including:
 - (a) Outages of other Generation Units, Aggregated Generating Units and Demand Side Units;
 - (b) Outages of Generation Units, Aggregated Generating Units and Demand Side Units on the Other Transmission System;
 - (c) Interconnectors and Inter-jurisdictional Tie Line; and
 - (d) **Transmission** outages, **Load** growth and fuel security.

In the event that a proposed Generator's, Interconnector Operator's and Generator Aggregator's, Demand Side Unit Operator's Dispatchable Demand Customer's Outage has a detrimental effect on Capacity Adequacy or system security either in the Transmission System or in the Other Transmission System, the relevant TSO will highlight the shortfall to all Generators, Interconnector Operators, Generator Aggregators, Demand Side Unit Operators Dispatchable Demand Customers and Suppliers.

- OC2.4.8 Any concerns which the **TSO** may have with the **Generation Outage Programme** must be notified to all **Generators**, **Interconnector Operators**, **Generator Aggregators** and **Demand Side Unit Operators** Dispatchable Demand Customers by the end of June in year 0.
- OC2.4.9 Between the end of June in year 0 and the end of September in year 0 any concerns raised by the TSO shall be notified to Generators, Interconnector Operators, Generator Aggregators and Demand Side Unit OperatorsDispatchable Demand Customers. The TSO will enter into discussions with Generators, Interconnector Operators, Generator Aggregators and Demand Side Unit OperatorsDispatchable Demand Customers to find a resolution. If by the end of September in year 0 no resolution has been agreed and in the opinion of the TSO

there is a capacity shortfall in year 1, the TSOs will jointly issue a System Capacity Shortfall Warning.

- OC2.4.10 The TSO shall issue to each Generator, Interconnector Operator, Generator Aggregator and Demand Side Unit Operator Dispatchable Demand Customer a Generation Outage Programme for that Generator, Generator Aggregator, Demand Side Unit Operator Dispatchable Demand Customer for years 1 to 3 by the last Business Day of September in year 0, including the COP for year 1.
- OC2.5.1.1 Each week during year 0 after for a forecast period of four weeks, the **TSO** shall:
 - use Generators', Interconnectors', Generator Aggregators' and Demand Side Unit Operators' Dispatchable Demand Customers' submissions for Outages;
 - (b) use Generators', Interconnectors' and Generator Aggregators' submissions for Forced Outage Probabilities; use Generators' and Generator Aggregators' submissions for Forced Outage Probabilities;
 - (c) in a separate exercise, use the TSO's assessment of the Generators', Interconnectors' and Generator Aggregators' Forced Outage Probabilities, Generators', Interconnectors' submissions and historical data; and
 - (d) based on (a), (b), (c) and Demand forecasts the TSO shall formulate an Availability forecast, a Demand forecast, the capacity margin and a Capacity Adequacy Indicator for each daily peak. This information shall be published on the TSO website at 15.00 every Thursday and updated the following Monday for that forecast period.
- OC2.6.1 A request for a change to an **Outage** included in the **Committed Outage Programme** or an additional **Outage** may be initiated either by the **TSO** or by a **Generator**, **Interconnector Operator**, **Generator Aggregator** or **Demand Side Unit Operator Dispatchable Demand Customer** at any time.

- OC2.6.2.1 The TSO may at any time request from a Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer a change in the timing or duration of any Outage of one of the Generator's Generation Units, Interconnectors, Demand Side Unit Operator's Dispatchable Demand Customer's Demand Side Units or an Individual Demand Site which constitutes the Demand Side Unit in the Committed Outage Programme.
- OC2.6.2.2 A Generator, Interconnector Operator, Generator Aggregator or Demand Side

 Unit Operator Dispatchable Demand Customer may respond either by declining the
 request, or by agreeing to the request (in which case the COP shall be deemed to be
 amended accordingly). Generators, Interconnector Operators, Generator
 Aggregators and Demand Side Unit Operators Dispatchable Demand Customers
 shall make every reasonable effort to co-operate with changes requested by the TSO.
- OC2.6.2.3 If a Generator, Interconnector Operator, Generator Aggregator or Demand Side

 Unit Operator Dispatchable Demand Customer responds by agreeing to the
 request subject to specific conditions, the TSO may respond by either confirming
 agreement to those conditions, in which case the conditions specified by the
 Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit
 Operator Dispatchable Demand Customer shall be deemed to have been accepted,
 or by declining agreement. Where the TSO agrees to the conditions the COP shall be
 deemed to be amended accordingly. Where the TSO declines to agree to the
 conditions, then the TSO may negotiate with the Generator, Interconnector
 Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable
 Demand Customer as to revised or alternative conditions, which would be
 acceptable.
- OC2.6.3 Outage change initiated by a Generator, Interconnector Operator, Generator

 Aggregator or Demand Side Unit Operator Dispatchable Demand Customer
- OC2.6.3.1 Generators, Interconnector Operators, Generator Aggregators or Demand Side

 Unit Operators Dispatchable Demand Customers Aggregators may at any time
 request the TSO for a change in the timing or duration of any Outage of one of the
 Generator's Generation Units, Interconnectors or Demand Side Unit
 Operator's Dispatchable Demand Customer's Demand Side Units or an
 Individual Demand Site which constitutes the Demand Side Unit in the Committed
 Outage Programme.

- OC2.6.3.2 Where a change to the COP is proposed by a Generator, Interconnector Operator,
 Generator Aggregator or Demand Side Unit Operator Dispatchable Demand
 Customer, the TSO shall evaluate whether the change is likely to have a detrimental
 effect on Capacity Adequacy or on the secure operation of the Transmission
 System. This shall be done within a reasonable time frame, taking into consideration
 the extent of the change and the timing of the Outage
- OC2.6.3.3 Where, in accordance with OC2.5, the request is not likely to have a detrimental effect on Capacity Adequacy or the secure operation of the Transmission System then the TSO shall amend the COP accordingly. The Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer shall be advised by the TSO that the change has been accepted.
- OC2.6.3.4 Where, in accordance with OC2.5, the Outage change is likely to have a detrimental effect on Capacity Adequacy or requirements for the secure operation of the Transmission System then the TSO shall not amend the COP. The TSO shall contact the Generator, Generator Aggregator or Demand Unit Operator Dispatchable Demand Customer and inform the Generator, Interconnector Operator's, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer that the change to the COP has not been accepted, the TSO shall at the Generator's, Interconnector Operator, Generator Aggregator's or Demand Side Unit Operator's Dispatchable Demand Customer's request enter into discussions with the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer to facilitate an alternative modification which may meet the requirements of the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer while not having an unacceptable effect on Capacity Adequacy or requirements for secure operation of the Transmission System. In the event that the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer wishes to avail of an alternative modification, it shall submit a change request in accordance with OC2.6.3.1.
- OC2.6.3.5 Where the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer has been notified that the change to the COP has not been accepted, but in the view of the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer it must force the Generation Unit, Interconnector or Demand Side Unit to be unavailable due to technical or safety issues, then the Generator, Interconnector Operator, Generator Aggregator,

Demand Side Unit Operator Dispatchable Demand Customer shall inform the **TSO** immediately in accordance with the requirements to submit an **Availability Notice**.

- OC2.7.2 The **TSO** may, where security of supply or the secure operation of the **Transmission System** or the **Other Transmission System** would be at risk, request alterations to maintenance notified under Section OC2.7.1. The **TSO** shall make reasonable endeavours to give as much notice as possible for such requests for alterations. Where the **TSO** makes such a request, the **Generator**, **Interconnector Operator**, **Generator Aggregator** or **Demand Side Unit Operator Demand Customer** shall use reasonable endeavours to comply with the request in arriving at the **User's** final programme for such maintenance.
- OC2.7.3 The **DSO** shall co-operate with the **TSO** and **Embedded Generators** and **Demand Side Unit Operators Dispatchable Demand Customers** in all phases of **Outage**planning to promote **Capacity Adequacy** and ensure system security.
- OC7.1.3.1 OC7.1 applies to the **TSO** and to **Users**, which term in OC7.1 means:-
 - (a) **Generators**;
 - (b) Interconnector Operators;
 - (c) Dispatchable WFPSs;
 - (d) **Distribution System Operator**;
 - (e) **Demand Customers**; and
 - (f) Demand Side Unit Operators Dispatchable Demand Customers.

- OC7.2 applies to the **TSO** and to **Users**, which term in OC7.2 means:
 - (a) **Generators**;
 - (b) Interconnector Operators;
 - (c) Dispatchable WFPS;
 - (d) **Distribution System Operator**;
 - (e) Demand Customers; and

(f) Demand Side Unit Operators Dispatchable Demand Customers.

- OC7.2.4.3.5 Dispatchable Demand Customers are required to provide a Control Facility. The Dispatchable Demand Customer shall ensure acting in accordance with Good Industry Practice that the Control Facility is staffed with appropriate staffing levels at all times.
- OC7.2.4.3.6 For Dispatchable Demand Customers, the Control Facility shall be staffed by a Responsible Operator(s) who shall respond to communications from the TSO without undue delay (except where otherwise provided for by agreement between the Dispatchable Demand Customer and the TSO, such agreement not to be unreasonably withheld) and are of suitable experience and training and are authorised to perform functions on behalf of the Dispatchable Demand Customer as follows:
 - (a) to accept and execute Dispatch Instructions;
 - (b) to receive and acknowledge receipt of requests, for amongst other matters, operation outside the Declared values of Demand Side Unit MW Availability.
- OC7.2.4.3.7 The Responsible Manager shall be authorised by the Dispatchable Demand

 Customer to perform the following functions on behalf of the Dispatchable Demand

 Customer:
 - (a) to make estimates in accordance with Good Industry Practice as to the Demand Side Unit MW Availability;
 - (b) to make Declarations of the Demand Side Unit MW Availability for Dispatchable Demand Customer; and
 - (c) to communicate with respect to issues regarding Outages of each Individual

 Demand Site within the Demand Side Unit.

The **Dispatchable Demand Customer** may, from time to time, notify a replacement contact location and personnel which meets the foregoing requirements.

- OC7.2.4.7.1 Demand Side Unit Operators are required to provide a Control Facility. The Demand Side Unit Operator shall ensure acting in accordance with Good Industry Practice that the Control Facility is staffed with appropriate staffing levels at all times.
- OC7.2.4.7.2 For **Demand Side Unit Operator**, the **Control Facility** shall be staffed by a **Responsible Operator(s)** who shall respond to communications from the **TSO** without undue delay (except where otherwise provided for by agreement between the **Demand Side Unit Operator** and the **TSO**, such agreement not to be unreasonably withheld) and are of suitable experience and training and are authorised to perform functions on behalf of the **Demand Side Unit Operator** as follows:
 - (a) to accept and execute **Dispatch Instructions**;
 - (b) to receive and acknowledge receipt of requests, for amongst other matters, operation outside the **Declared** values of **Demand Side Unit MW** Availability.
- OC7.2.4.7.3 At any point in time, a single person shall be designated by the **Demand Side Unit**Operator and notified to the **TSO** as the **Responsible Manager**. The **Responsible**Manager shall be responsible for dealing with the **TSO** on matters relating to the **Grid**Code other than as provided for in OC7.2.4.3.6 and OC7.2.4.3.7. In the event that the Responsible Manager is not a person on duty at the Control Facility of the Demand Side Unit Operator, then the Responsible Manager must be capable of being contacted from the Control Facility of the Demand Side Unit Operator at all times, and in the event that the **TSO** issues a request to the Control Facility of the Demand Side Unit Operator requiring the Responsible Manager to contact the NCC, the Responsible Manager shall comply with the request without unreasonable delay and in any case within 15 minutes of the request.
- OC7.2.4.7.4 The **Responsible Manager** shall be authorised by the **Demand Side Unit Operator** to perform the following functions on behalf of the **Demand Side Unit Operator**:
 - to make estimates in accordance with Good Industry Practice as to the
 Demand Side Unit MW Availability;
 - (b) to make **Declarations** of the **Demand Side Unit MW Availability** for **Demand Side Unit Operator**; and
 - to communicate with respect to issues regarding Outages of each Individual
 Demand Site within the Demand Side Unit.

The **Demand Side Unit Operator** may, from time to time, notify a replacement contact location and personnel which meets the foregoing requirements.

OC.7.2.4.7.5 Unless otherwise agreed with the **TSO**, each **Individual Demand Site** comprising a **Demand Side Unit** shall have a **Responsible Operator** that must be capable of being contacted from the **Control Facility** of the **Demand Side Unit Operator** at all times and is capable of being at the **Individual Demand Site** within 1 hour of request to respond to any query or issue from the **Responsible Operator** at the **Control Facility** of the **Demand Side Unit Operator** or the **TSO**.

- OC7.2.5.3.2 For Demand Side Unit Operators Dispatchable Demand Customers, SCADA remote terminal equipment shall also be required at the Control Facility for the transmission of signals and indications to and from the NCC. The signals and indications which must be provided by Demand Side Unit Operators Dispatchable Demand Customers for transmission by SCADA equipment to the NCC are the signals and indications referred to under Connection Conditions together with such other information as the TSO may from time to time, by notice to Demand Side Unit Operators Dispatchable Demand Customers, reasonably require.
- OC7.2.5.3.3 Interface cabinets shall be installed in the control room of the Transmission Station at the User Site and also on the User's Site or, in the case of a Demand Side Unit Operators Dispatchable Demand Customers, in the User's Control Facility. Provision and maintenance of wiring and signalling from the User's Plant and Apparatus to the User's interface cabinet shall be the responsibility of the User. The TSO shall provide the cables to interconnect these interface cabinets.
- OC7.2.6.1.1 Other than where specifically provided for in other sections of the **Grid Code**, communication between the **TSO** and **Users** on matters pertaining to the real time operation of the **Transmission System** shall take place between the **NCC** and the **UserGenerator's Control Facility**.
- OC7.2.7.2 Data and notices to be submitted to the **TSO** under the **Grid Code** shall be addressed to the person, and at the address, notified by the **TSO** to **Users** for such

purpose, following entry into the **Connection Agreement** or for a **Demand Side Unit** prior to issuance of the **Operational Certificate**, or to such other person or address, as the **TSO** may notify to **Users** from time to time.

OC7.2.7.3 Data and notices to be submitted to **Users** under the **Grid Code** shall be addressed to the **User's** nominated representative (at the address notified by **Users** to the **TSO** following entry into the **Connection Agreement** or for a **Demand Side Unit** prior to issuance of the **Operational Certificate** for such purpose (and failing such notification to the principal office of the addressee)), or to such other person or address as **Users** may notify to the **TSO** from time to time.

OC8.3 SCOPE

OC8 applies to the **TSO** and to all **Users**, which term in this OC8 means:

- (a) Generators which includes all Generators with units with RegisteredCapacity greater than 5 MW and Generator Aggregators;
- (b) Interconnectors;
- (c) Demand Side Unit Operators Dispatchable Demand;
- (d) The **Distribution System Operator**; and
- (e) **Demand Customers**.
- ocs.6.2.5 where the User is a Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer, the Dispatch or Dispatches required by the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer for completion of the test, if any, including the duration of Dispatch shall be supplied to the TSO as part of the proposal. Where the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer may not know the entire Dispatches required for completion of the test until part of the test is completed then the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer when proposing the test shall:
 - (a) divide the test into sections as appropriate;
 - (b) indicate and discuss with the **TSO** which sections of the test can be completed in stages and which cannot; and

indicate possible variations of the test for the sections that can be completed in stages.

Additionally, the factors that influence the completion of the stages should be outlined to the **TSO**, namely, if the procedure to be followed for a certain stage depends on the outcome of a previous stage.

OC8.6.3 A request by the Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Gustomer for an Operational Test requiring a Generation Unit, Interconnector or Demand Side Unit to be Dispatched to a particular MW Output or operating condition shall not be considered a Re- declaration of Availability, Ancillary Service capability or Operating Characteristics.

Where an Operational Test proposed by a Generator, Interconnector Operator, Generator Aggregator or Demand Side Unit Operator Dispatchable Demand Customer in respect of one of its Generation Units, Interconnector or Demand Side Units requires a Dispatch that exceeds the currently declared values of Availability, Ancillary Service capability where applicable, or Operating Characteristics of the Generation Unit, Interconnector or Demand Side Units, then the TSO may so Dispatch the Generation Unit, Interconnector or Demand Side Units for the period required for the Operational Test, in accordance with the relevant provisions of the Grid Code.

OC9.3 SCOPE

OC9 applies to the **TSO** and to all **Users**, which term in this OC9 means:

- (a) **Generators** which for the purposes of OC9 includes all **Generators** with **Registered Capacity** greater than 5 MW;
- (b) Interconnector Operators;
- (c) The Distribution System Operator; and
- (d) Demand Customers including Dispatchable Demand Customers.; and
- (e) **Demand Side Unit Operators.**

OC9.4.1 In the event of a **System Emergency Condition** or imminent shortfall of MW capacity, the **TSO** may issue any of several **Alerts** to the **Generator**, key **Transmission Stations**, and **Distribution Control Centres** and **Demand Side Unit Operators**. These **Alerts** may include an **Amber Alert**, **Red Alert** or **Blue Alert**, or other **Alerts** as may be agreed from time to time.

- OC10.2.2 In order to achieve the primary objective set out in OC10.2.1, OC10 establishes procedures for **Monitoring**, **Testing** and **Investigation**. In particular, this facilitates adequate assessment of each of the following:
 - (a) whether Centrally Dispatched Generation Units (CDGU), Interconnectors and Demand Side Units comply with Dispatch Instructions;
 - (b) whether Generators, Interconnectors, Demand Side Unit Operators Dispatchable Demand Customers and Generator Aggregators are in compliance with Declarations of Availability, Ancillary Services capabilities, Operating Characteristics and any other data required to be registered by those Generators, Interconnectors, and Demand Side Unit Operator Dispatchable Demand Customers and Demand Side Unit Aggregators under the Grid Code;
 - (c) whether Power Quality of Users conforms with International Electro technical Commission Standards: 'Electromagnetic Compatibility-Limits-Limitation of emission of harmonic currents for equipment connected to medium and high voltage power supply systems [IEC/TR3 61000-3-6] and 'Electromagnetic Compatibility-Limits-Limitation of voltage fluctuation and flicker for equipment connected to medium and high voltage power supply systems '[IEC/TR3 61000-3-7];
 - (d) whether Users are in compliance with protection requirements and protection settings under the Grid Code, Users' Connection Agreements, Ancillary Service Agreements and System Support Agreements between Users and the TSO;
 - (e) whether Generators have the ability to generate on Primary Fuel and Secondary Fuel (where applicable) and have the ability to carry out on online fuel changeover; and

(f) whether Generators have the required Secondary Fuel stock levels at the Generator Site and Off-Site Storage Location.

OC10.3 SCOPE

OC10 applies to the **TSO** and to the following **Users**

- (a) Generators which, for the purposes of OC10, include all Generators with Generation Unit(s) subject to Central Dispatch or with Generation Unit(s) that have a total Registered Capacity greater than 4 MW on a single Site;
- (b) Interconnector Operators;
- (c) The **Distribution System Operator**;
- (d) Suppliers;
- (e) **Demand Customers**;
- (f) Demand Side Unit Operators Dispatchable Demand Customers in respect of their Demand Side Units; and;
- (g) Generator Aggregators in respect of the Generation Units which they represent.

OC10.4.5.2 Compliance of **Demand Side Units** with **Dispatch Instructions**

The following validation will be performed in real time:

(i) For a Demand Side Unit or Aggregated Demand Side Unit which achieves the Demand Side Unit MW Response only by operating a Generator or Generators, the A Demand Side Unit or the Aggregated Demand Side Unit—shall be deemed compliant if the SCADA signal confirms that the increased output of the generation is within 5% of the Demand Side Unit MW Response is within 5% of the Dispatch Instruction.

The following validation will be performed post event—on a needs—be basis and will not be performed in real time:

(ii) For a A Demand Side Unit or Aggregated Demand Side Unit which achieves the Demand Side Unit MW Response only by reducing their Demand, the Demand Side Unit or the Aggregated Demand Side Unit shall be deemed to be compliant with the Dispatch Instruction if the difference between the Demand Side Unit Energy Profile and the metered

Demand plus the **Demand Side Unit MW Response** is within 5% of the **Demand Side Unit Energy Profile**.

- (iii) For a Demand Side Unit or Aggregated Demand Side Unit which achieves the Demand Side Unit MW Response by reducing their Demand and operating a generator or generators, the Demand Side Unit or the Aggregated Demand Side Unit shall be deemed to be compliant with the Dispatch Instruction if the difference between the Demand Side Unit Energy Profile and the metered Demand plus the Demand Side Unit MW Response is within 5%.
- (iii) For **Demand Side Units** which are not **Dispatched** but have been declared **Available** in an **Availability Notice**, the **Demand Side Unit** shall be deemed to be compliant with its declared **Demand Side Unit Energy Profile** if the difference between the **Demand Side Unit Energy Profile** and the metered **Demand** is within 5% of the **Demand Side Unit Energy Profile**.
- OC10.7.1 Non-compliance with a Dispatch Instruction issued by the TSO to a Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator.
- OC10.7.1.1 When the TSO considers that a Generator, Interconnector Operator, a Demand Side Unit Operator Dispatchable Demand Customer or a Generator Aggregator is not in compliance with a Dispatch Instruction then the TSO shall inform the Generator, the Interconnector Operator, the **Demand** Side Operator Dispatchable Demand Customer or the Generator Aggregator by agreed methods, identifying the relevant Generation Unit, Interconnector or Demand Side Unit, and identifying the Dispatch Instruction and the time of issue of the Dispatch Instruction with which the TSO considers the Generator, the Interconnector Operator, the Demand Side Unit Operator Dispatchable Demand Customer or the Generator Aggregator is not in compliance. This shall be known as a "Warning for non-compliance with a Dispatch Instruction". The Warning is to contain a Dispatch Instruction which may be identical to the original Dispatch Instruction or which may differ from it. The occurrence of the Warning shall be logged by the TSO and by the Generator. the Interconnector Operator, **Demand** Side Unit Operator Dispatchable Demand Customer or the Generator Aggregator.
- OC10.7.1.2 On receipt of a Warning for non-compliance with a Dispatch Instruction, the Generator, the Interconnector Operator, Demand Side Unit

Operator Dispatchable Demand Customer or Generator Aggregator must as soon as possible, and in any case within ten (10) minutes of the receipt of the Warning:

- (a) commence to comply with the **Dispatch Instruction** included with the **Warning** (this may be the original or a modified **Dispatch Instruction** as outlined in OC10.7.1.1); or
- (b) reply to the **TSO**, disputing in good faith the validity of the original **Dispatch Instruction**, detailing the grounds on which the validity is being disputed; or
- reply to the **TSO**, disputing in good faith the validity of the assessment of non-compliance. In this event the **Generator**, the **Interconnector Operator**, the **Demand Side Unit Operator Dispatchable Demand Customer** or the **Generator Aggregator** must as soon as is reasonably practicable, inform the **TSO** in detail of the grounds on which the assessment of non-compliance is being disputed; or
- (d) reply to the TSO, giving a reason for inability to comply with the Dispatch Instruction, and making a revised Declaration in respect of the Availability, Ancillary Service capabilities or Operating Characteristics, as appropriate.
- OC10.7.1.3 If the Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator complies in accordance with OC10.7.1.2 (a), no further action shall arise.
- OC10.7.1.4 In the event of the Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator making a revised Declaration under OC10.7.1.2 (d), the TSO shall then issue a new Dispatch Instruction, consistent with the revised Declaration. The revised Declaration will be backdated to the time of issue of the relevant Dispatch Instruction. Notwithstanding the backdating of the revised Declaration, the Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator will still be deemed under OC10.7.1.1 as having failed to comply with a Dispatch Instruction.
- OC10.7.1.5 In the event of OC10.7.1.2 (b) or OC10.7.1.2 (c) applying, the **TSO** shall consider the substance of the Generator's, Interconnector Operator's, Demand Side Unit Operator's Dispatchable Demand Customer's or Generator Aggregator's disputation. The TSO shall, where the TSO considers appropriate, communicate with the Generator, Interconnector Operator, **Demand** Side Unit Operator Dispatchable Demand Customer or Generator Aggregator to clarify aspects relating to the issue and receiving of the Dispatch Instruction, and the Generator's, Interconnector Operator's, **Demand** Side Unit Operator,s Dispatchable Demand Customer,s or Generator Aggregator's actions.

The TSO shall acting reasonably determine the validity of the Generator's, Interconnector Operator's, Demand Side Unit Operator's Dispatchable Demand Customer's or Generator Aggregator's disputation, and shall inform the Generator, Interconnector Operator's, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator as to its decision. The TSO shall record both its decision, and also all pertinent information relating to the event, including the Generator's, Interconnector Operator's, Demand Side Unit Operator's Dispatchable Demand Customer's or Generator Aggregator's disputation and such information shall be deemed to be Operational Data.

- OC10.7.1.6 Where the TSO, acting reasonably, is of the view that a disputation given by a Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator is not valid or not wholly valid or if the Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator has not replied in accordance with OC10.7.1.2, the TSO shall inform the Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator that it is overriding, by means of a Post Event Notice, the Generator's Declaration or Interconnector's Declaration in respect of the Availability, Ancillary Service capabilities or Operating Characteristics of the Generation Unit or Interconnector as appropriate. The Post Event Notice shall govern until such times as the Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or Generator Aggregator submits a revised Availability Notice.
- OC10.7.3 Non-compliance by a Generator, Interconnector Operator, Demand Side Unit

 Operator Dispatchable Demand Customer or Generator Aggregator with an

 Availability Notice
- OC10.7.3.1 In the event that the performance of a Generation Unit, Interconnector, Demand Side Unit or Aggregated Generator is deemed by the TSO to be in non-compliance with its Declared Availability, then the TSO shall notify the Generator, Interconnector Operator, Demand Side Unit Operator Dispatchable Demand Customer or the Generator Aggregator of the non-compliance.
- OC10.7.3.2 Having so informed the **Generator**, **Interconnector Operator**, **Demand Side Unit**Operator Dispatchable Demand Customer or Generator Aggregator, the TSO

shall, by means of a **Post Event Notice**, override the **User's Availability Notice**, with a value as appropriate to the outcome of the **Test** or **Investigation**. The revised **Declaration** shall be effective from the time of commencement of the **Test** or **Investigation** on which the non-compliance has been assessed, or such later time as may, in the opinion of the **TSO** acting reasonably, be appropriate if the non-compliance did not apply to the full period of the **Test** or **Investigation**.

- OC10.7.3.3 The economic consequence of non-compliance by a **Generator**, **Interconnector**Operator, **Demand Side Unit Operator**Demand Customer or

 Generator Aggregator with **Declared Availability** will be addressed in the **SEM**Trading and **Settlement Code** and other agreements as appropriate.
- OC10.7.4 Non-compliance by a Generator, Demand Side Unit Operator or Interconnector

 Operator with Declared Ancillary Services or Declared Technical Parameters
- In the event that the performance of a Generation Unit, Demand Side Unit or Interconnector is deemed by the TSO to be in non-compliance with its Declared Ancillary Services capability or Operating Characteristics, then the TSO shall notify the Generator, Demand Side Unit Operator or Interconnector Operator of the non-compliance, and having so informed the Generator, Demand Side Unit Operator or Interconnector Operator then the TSO shall by means of a Post Event Notice override the Generator's Declaration, Demand Side Unit Operator Declaration or Interconnector Operator's Declaration in respect of Ancillary Services or Operating Characteristics as appropriate.
- OC10.7.4.2 The consequences of non-compliance by a Generator, Demand Side Unit Operator or Interconnector Operator with Declared Ancillary Services or Declared Technical Parameters will be addressed in the SEM Trading and Settlement Code and other agreements as appropriate.
- OC10.7.5.3 In the event that the performance of a **Demand Side Unit** is deemed by the **TSO** in accordance with the provisions of this OC10 to be in non-compliance with its **Operating Characteristics**, including **Demand Side Unit Energy Profile**, or with a **Connection Condition**, then the **TSO** shall notify the **Demand Side Unit Operator Dispatchable Demand Customer** or the **Aggregator** of the non-compliance and the **Demand Side Unit Operator Dispatchable Demand Customer** shall take immediate action to remedy such non compliance. The terms of this

OC10.7.5 shall be without prejudice to the rights of the **TSO** to **De-energise** the **Demand Site** and **Apparatus** in accordance with the terms of OC9.6.

OC11.3 SCOPE

OC11 applies to the **TSO** and to the following **Users**:

- (a) **Generators**;
- (b) Interconnector Operators;
- (c) the **Distributor System Operator**;
- (d) **Demand Customers**;
- (e) Demand Side Unit Operators Dispatchable Demand Customers;
- (f) the **TAO**; and
- (g) agents of **the TSO** or agents of any **User** (as defined in OC 11.3 (a), (b), (c) and (d)).

SDC1.3 SCOPE

SDC1 applies to the **TSO** and to the following **Users**:

- (a) **Generators** with regard to their:
 - CDGUs; and
 - Controllable WFPSs.
- (b) Pumped Storage Generators with regard to their Pumped Storage Plant Demand;
- (c) **Interconnector Owners** with regard to their **Interconnectors**;
- (d) In respect of the submission of **Commercial Offer Data** under SDC1.4.4.5 only, **Interconnector Users** in respect of their **Interconnector Units**;
- (e) Dispatchable Demand Customers in relation to their Individual Demand Site;
- (ef) Demand Side Unit Operators Dispatchable Demand Customers in relation to their Demand Side Units Aggregated Demand Sites; and
- (f) **Generator Aggregators** in respect of their **Aggregated Generating Units**. Each of which (other than the **TSO**) is a "**User**" under this SDC1.

SDC1.4.3.4 Availability of Demand Side Units

Each **Demand Side Unit Operator** Dispatchable Demand Customer shall, subject to the exceptions in SDC1.4.3.5, use reasonable endeavours to ensure that it does not at any time declare the **Demand Side Unit MW Availability** and the **Demand Side Unit** characteristics of its **Demand Side Unit** at levels or values different from those that the **Demand Side Unit** could achieve at the relevant time. The **TSO** can reject declarations to the extent that they do not meet these requirements.

SDC1.4.3.5 SDC1.4.3.4 shall not apply to the extent:

- (a) it would require the Demand Side Unit Operator Dispatchable Demand Customer to declare levels or values better than Demand Side Unit MW Capacity and Technical Parameters as submitted under the Planning Code in respect of a Demand Side Unit;
- (b) necessary during periods of *Scheduled Outage* or *Short Term ScheduledOutage* or otherwise with the consent of the TSO;
- (c) necessary while repairing or maintaining the **Demand Side Unit** or equipment necessary to the operation of the **Demand Side Unit** where such repair or maintenance cannot reasonably, in accordance with *Prudent Utility Practice*, be deferred to a period of **Scheduled Outage** or **Short Term Scheduled Outage**.
- (d) necessary to avoid an imminent risk of injury to persons or material damage to property (including the **Demand Side Unit**);
- (e) it is not lawful for the Demand Side Unit Operator Dispatchable Demand Customer to change its Demand Side Unit MW Response or to operate its Demand Side Unit.

SDC1.4.3.6 Changes in **Availability**:

- (a) Increasing: If a Generator, a Generator Aggregator or a Demand Side Unit Operator Dispatchable Demand Customer in respect of a CDGU, an Aggregated Generating Unit, a Demand Side Unit or Pumped Storage Plant in relation to Demand, issues an Availability Notice increasing (from zero or otherwise) the level of Availability or Demand Side Unit MW Availability from a specified time, such notice shall be construed as meaning that:
 - (i) in the case of a CDGU and/or Aggregated Generating Unit, the CDGU and/or Aggregated Generating Unit is capable of being synchronised to the Transmission System or Distribution System

- at that specified time or increasing its **MW Output** at that specified time as the case may be;
- (ii) in the case of a CDGU which is an Open Cycle Gas Turbine, theCDGU is capable of being started at that specified time; or
- (iii) in the case of a **Demand Side Unit**, the **Demand Side Unit** is capable of delivering a greater **Demand Side Unit MW Response** at that specified time.
- (b) Controllable WFPS: If a Generator or, where relevant a Generator Aggregator, in respect of a Controllable WFPS, issues an Availability Notice increasing (from zero or otherwise) or decreasing the level of Availability from a specified time, such notice shall be effective from the Trading Period following the specified time.
- Decreasing: When a CDGU and/or Controllable WFPS is Synchronised to the System the Generator may have occasion to issue an Availability Notice decreasing the level of Availability of the CDGU and/or Controllable WFPS from a specified time. Such notice shall be construed as meaning that the CDGU and/or Controllable WFPS is capable of maintaining Load at the level of the prevailing Availability until the time specified in the notice. Thereafter, the CDGU and/or Controllable WFPS shall be capable of maintaining Load to the level which would have been achieved if a Dispatch Instruction had been given to reduce the Load. This would have occurred with effect from the specified time, at the maximum De-Loading Rate and/or Ramp-Down Rate declared for the CDGU and/or Controllable WFPS as a Technical Parameter at such time down to the level of Availability specified in the new Availability Notice.

When a Demand Side Unit is providing a Demand Side Unit MW Response the Demand Side Unit may have occasion to issue an Availability Notice decreasing the level of Demand Side Unit MW Availability of the Demand Side Unit from a specified time. Such notice shall be construed as meaning that the Demand Side Unit is capable of maintaining Demand Side Unit MW Response at the level of the prevailing Demand Side Unit MW Availability until the time specified in the notice. Thereafter, the Demand Side Unit shall be capable of maintaining Demand Side Unit MW Response to the level which would have been achieved if a Dispatch Instruction had been given to reduce the Demand Side Unit MW Response. This would have occurred with effect from the specified time, at the Maximum Ramp Down Rate declared for the Demand Side Unit as a Technical Parameter at such time down to the level of Demand Side Unit MW Availability specified in the new Availability Notice.

SDC1.4.4.2 Additional Grid Code Characteristics Notice

The following items are required to be submitted by each **User**, with the exception of **Generator Aggregators**, direct to the **TSO**:

- (a) Individual CCGT Unit data equivalent to the data required for a CCGT Installation. It shall also show any revisions to the Technical Parameters for each of the CCGT Units within it.
 - [Note: The term "CCGT Module" applies to the SONI Grid Code and the term "CCGT Unit" will apply to the EirGrid Grid Code.]
- (b) Different Fuels: In the case where a CDGU is capable of firing on different fuels, then the Generator shall submit an Additional Grid Code Characteristics Notice in respect of any additional fuel for the CDGU, each containing the information set out in SDC1.4.4.1 above for each fuel and each marked clearly to indicate to which fuel it applies.
- (c) Export adjustment factors applied by the **User** in submitting data and that may be applied by the **TSO** where applicable in issuing **Dispatch**Instructions and otherwise in calculations relating to instructions in relation to the relevant **Plant** and/or **Apparatus**, between the **Generator Terminals** and the **Connection Points**.
- (d) In the case of **Interconnector Owners**, **Interconnector** data, including but not limited to the **Availability** of **Interconnector Filters**.
- (e) In relation to each **Demand Side Unit**, the **Demand Side Unit Energy Profile** and the **Initial-Demand Side Unit MW Response Time**.
- (f) Where there is a Ancillary Services Agreement in place, the Ancillary Services which are Available.
- (g) The parameters listed in Appendix A Part 2 of SDC1.
- (h) A Generator shall submit to the TSO the Operating Reserve capabilities for each category of Operating Reserve defined in OC4.6.3 for each of its CDGUs for each Trading Period.

[Note: Please note that the above paragraph only applies to the EirGrid Grid Code only.]

A **User** shall notify the **TSO** as soon as it becomes aware, acting in accordance with **Prudent Utility Practice**, that any of the data submitted under SDC1.4.4.2 changes.

- (a) Each:
 - Generator:
 - Pumped Storage Generator;
 - Interconnector User;
 - Demand Side Unit Operator Dispatchable Demand Customer; and
 - Generator Aggregator,

shall in respect of:

- each of its CDGUs;
- each of its Pumped Storage Plant Demand;
- each of its Interconnector Units:
- each of its Demand Side Units; and
- its Aggregated Generating Units,

submit to the TSO, either directly or by means of an Intermediary on its behalf, Commercial Offer Data by Gate Closure for the following Trading Day in accordance with the TSC.

- (b) Each Generator shall in respect of each of its Energy Limited Generating Units submit an Energy Limit as well as the Commercial Offer Data by Gate Closure for the following Trading Day.
- (c) Each Pumped Storage Plant will, with respect to its Pumped Storage Plant Demand, submit its Target Reservoir Level by Gate Closure for the following Trading Day.

The **TSO** may require, by notice to the relevant **User**, the data referred to at SDC1.4.4.5 (a) to (c) to be submitted to it directly under the **Grid Code**. All data items submitted under this SDC1.4.4.5 are to be at levels of **MW Output** at the **Connection Point**.

SDC1.4.8.7 (a) The Synchronising and De-Synchronising times (and, in the case of Pumped Storage Plant Demand, the relevant effective time) shown in the Indicative Operations Schedule are indicative only and it should be borne in mind by Users that the Dispatch Instructions could reflect more or different CDGU, Aggregated Generating Unit and/or Controllable WFPS, Pumped Storage Plant Demand and/or Aggregate Generating Unit requirements than in the Indicative Operations Schedule. The TSO may issue Dispatch Instructions in respect of any CDGU and/or Aggregated Generating Unit, Controllable WFPS, Pumped Storage Plant Demand or Aggregated Generating Unit which has not declared an Availability or Demand Side Unit MW Availability of 0 MW in an Availability Notice. Users with CDGUs and/or Aggregated Generating Units, Controllable WFPS, Pumped

Storage Plant Demand shall ensure that their units are able to be Synchronised, or in the case of Pumped Storage Plant Demand, used at the times Scheduled, but only if so Dispatched by the TSO by issue of a Dispatch Instruction. Users shall, as part of a revision to the Technical Parameters, indicate to the TSO the latest time at which a Dispatch Instruction is required to meet the scheduled Synchronising time or in the case of Pumped Storage Plant Demand, the Scheduled relevant effective time.

(b) The provisions of SDC1.4.8.7(a) shall apply to **Demand Side Units** with the exception that reference to relevant effective time shall be read as a reference to **Initial-Demand Side Unit MW Response Time**.

SDC1 - Appendix A

Technical Parameter	CDGU				Control WFPS	DSU		Agg. Gen	CDGU <10MW	Pump Storage Demand
	Thermal	Hydro / En Ltd	Disp. WFPS	Pump S Gen	-	Individual Demand Site	Aggregated Demand Sites		-	-
Demand Side Unit MW Availability						√	*			
Forecast Minimum Generation Profile	✓	✓	√	✓		4	4		√	
Initial Demand Side Unit MW Response Time						~	~			
Minimum off time	✓	✓	✓	✓	√	√	✓		√	

- SDC2.1.2 SDC2 sets out the procedure for the **TSO** to issue **Dispatch Instructions** to:-
 - (a) **Generators** in respect of their **CDGUs** (which for the avoidance of doubt comprise, **Generating Units** subject to **Central Dispatch**, **CCGT**

- Installations, Hydro Units, Pumped Storage Generation and Dispatchable WFPSs);
- (b) Pumped Storage Generators in respect of their Pumped Storage Plant Demand;
- (c) Interconnector Owners in respect of their Interconnectors;
- (d) Dispatchable Demand Customers in respect of their Individual Demand Sites:
- (ed) Demand Side Unit Operators Dispatchable Demand Customers in respect of their Demand Side Units Aggregated Demand Sites; and
- (e) Generator Aggregators in respect of their Aggregated Generating Units.Controllable WFPSs are not currently subject to Dispatch Instructions.

SDC2.3 SCOPE

SDC2 applies to the TSO, and:-

- (a) Generators with regard to their CDGUs;
- (b) Pumped Storage Generators with regard to their Pumped Storage Plant Demand;
- (c) Interconnector Owners with regard to their Interconnectors;
- (d) Dispatchable Demand Customers in relation to their Individual Demand Sites:
- (ed) Demand Side Unit Operators Dispatchable Demand Customers in relation to their Demand Side Units Aggregated Demand Sites; and
- (fe) Generator Aggregators in respect of their Aggregated Generating Units. Each of which (other than the **TSO**) is a "**User**" under this SDC2.

SDC2.4.1.2 Additional factors which the **TSO** will also take into account are:

- (a) those Generators or Demand Side Unit Operators Dispatchable Demand Customers who have not complied with Dispatch Instructions or Special Actions;
- (b) real time variation requests; and
- (c) the need to Dispatch CDGUs, Aggregated Generating Units, Demand Side Units, Interconnector transfers, and Pumped Storage Plant Demand for Monitoring, Testing or Investigation purposes (and/or for other trading

purposes whether at the request of a **User**, for **Commissioning** or **Acceptance**, **System Tests** or otherwise).

SDC2.4.2.2 Issue of **Dispatch Instructions**

The **TSO** will issue **Dispatch Instructions** direct to:

- (a) the **Generator** for the **Dispatch** of each of its **CDGUs**.
- (b) the Generator Aggregator for the Dispatch of its Aggregated Generating Units.
- (c) the Demand Side Unit Operator Dispatchable Demand Customer and the Pumped Storage Demand User in respect of each of their Demand Side Units and Pumped Storage Plant Demand respectively.
- (d) the Interconnector Owner for the Dispatch of the Interconnector transfers.
- (e) The TSO may issue Dispatch Instructions for any CDGU, Demand Side Unit, Interconnector transfers, Pumped Storage Plant Demand and/or Aggregated Generating Units which has been declared Available in an Availability Notice even if that CDGU, Demand Side Unit, Interconnector transfers, Pumped Storage Plant Demand and/or Aggregated Generating Units was not included in an Indicative Operations Schedule.
- SDC2.4.2.13 (a) Subject to the exception set out below in this SDC2.4.2.13, Generators will only Synchronise or de-Synchronise CDGUs to the Dispatch Instructions of the TSO or unless it occurs automatically as a result of Special Protection Schemes or Low Frequency Relay operations. Subject to the exception set out below in this SDC2.4.2.13, Demand Side Unit Operators Dispatchable Demand Customers will only reduce or increase their Demand Side Unit MW Response to the Dispatch Instructions of the TSO or unless it occurs automatically as a result of Special Protection Schemes or Low Frequency Relay operations.
 - (b) De-Synchronisation may otherwise only take place without the TSO's prior agreement if it is to avoid, in the Generator's reasonable opinion, an imminent risk of injury to persons or material damage to property (including the CDGU). Demand Side Units, who can not maintain the provision of any Demand Side Unit MW Response, may otherwise only take place without

the **TSO's** prior agreement if it is to avoid, in the **Demand Side Unit Operator's Dispatchable Demand Customer's** reasonable opinion, an imminent risk of injury to persons or material damage to property (including the **Demand Side Unit**).

(c) If one of these exceptions occur, then the **TSO** must be informed that it has taken place as soon as possible.

SDC2.A.12 Dispatching a Demand Side Unit to change Demand Side Unit MW Response

SDC2.A.12.1 If the time of the **Dispatch Instruction** is 1400 hours, the Unit is Unit 1 and the **Demand Side Unit MW Response** to be achieved is 25 **MW**, the relevant part of the instruction would be, for example:

"Time 1400 hours. Unit 1 to 25 MW"

SDC2.A.12.2 If the start time is 1415 hours, it would be, for example:

"Time 1400 hours. Unit 1 to 25 MW, start at 1415 hours"

SDC2.A.12.3 Max Ramp Up and Max Ramp Down Rates are assumed to be in accordance with Technical Parameters and Additional Grid Code Characteristics Notice data unless otherwise stated. If different Max Ramp Up and Max Ramp Down Rates are required, the time to be achieved will be stated, for example:

"Time 1400 hours. Unit 1 to 25 MW by 1420 hours"

SDC2.A.1213 Dispatching a Demand Side Unit to an Initial Demand Side Unit MW Response

SDC2.A.1213.1 In this instance, fFor Demand Side Units, the Dispatch Instruction issue time will always have due regard for the Initial Demand Side Unit MW Response Time declared to the TSO by the Demand Side Unit Operator Dispatchable Demand Customer as a Technical Parameter or as part of Additional Grid Code Characteristics Notice data.

The instruction will follow the form, for example:

"Time 1300 hours. Unit 1, Initial Demand Side Unit MW Response at 14600 hours"

In relation to an instruction to the **Initial Demand Side Unit Response**, the start time referred to in SDC2.A.12.1 will be deemed to be the time at which **Initial Demand Side Unit MW Response** is to take place.

DEFINITIONS

Aggregated Demand Site	A group of Individual Demand Sites represented by a Demand Side Unit Operator Dispatchable Demand Customer, which together are capable of a Demand Side Unit MW Capacity equal to or above 4 MW (and which is therefore subject to Central Dispatch from the TSO). Each Individual Demand Site comprising an Aggregated Demand Site shall be in one currency zone and shall have a Demand Side Unit MW Capacity of no greater than 10 MW. Unless otherwise specified, information submitted in respect
	of an Aggregated Demand Site shall always be at an aggregated level.
Aggregated Maximum Import Capacity	In the case of a Dispatchable Demand Customer in respect of its Aggregated Demand Site or a Generator Aggregator in respect of its Aggregated Generating Unit, the aggregated values (kW and/ or kVA) provided in each Connection Agreement (or connection agreement to the Distribution System, as the case may be) for the Individual Demand Sites or Generating Units for which the Dispatchable Demand Customer or Generator Aggregator is responsible.
Aggregator	Either a Generator Aggregator or a Demand Side Unit Operator Dispatchable Demand Customer in respect of an Aggregated Demand Site.
Demand Side Unit Energy Profile	The estimated total Energy requirement for an Individual Demand Site or aggregated consumption for each Individual Demand Site which form part of an Aggregated Demand Site for each Trading Period in the following Optimisation Time Horizon period and which must be submitted to the TSO in the Availability Notice under SDC1.4.4.2SDC1.4.1.2.
Demand Side Unit Export Capacity	The export value (in MW, MVA) nominated by the Dispatchable Demand Customer for each Individual Demand Site within the Demand Side Unit.
Demand Side Unit Import Capacity	The import value (in MW, MVA) nominated by the

	Dispatchable Demand Customer for each Individual
	Demand Site within the Demand Side Unit.
Demand Side Unit MW Response	The proportion (in MW) of the Demand Side Unit MW
	Capacity that is delivered at a given time following a Dispatch
	Instruction Dispatch Instruction from the TSO. This value
	will be zero unless dispatched by the TSO .
Demand Side Unit	A person who operates a Demand Side Unit , with an
Operator Dispatchable Demand	aggregated Demand Side Unit MW Capacity not less than 4
Customer	MW.
Dispatch	The issue by the TSO of instructions to a Generator ,
	Pumped Storage Generator, Interconnector Owner,
	Interconnector Operator, Demand Side Unit
	Operator Dispatchable Demand Customer or Generator
	Aggregator in respect of its CDGU, Pumped Storage Plant
	Demand, Demand Side Unit, Aggregated Generating
	Units, or Interconnector tranche pursuant to SDC2 and the
	term "Dispatched" shall be construed accordingly.
DSO Connection Agreement	The bilateral agreement between the DSO and the DSO
200 Connection Agreement	Demand Customer, which contains the detail specific to the
	DSO Demand Customer's connection to the Distribution
	System.
DSO Demand Customer	A person to whom electrical Energy is provided by means of
	a direct connection to the Distribution System .
Individual Demand Site	A single premises of a Demand Customer connected to the
	Transmission System or a DSO Demand Customer
	connected to the Distribution System with a Demand Side
	Unit MW Capacity. The Individual Demand Site can have a
	Demand Side Unit Export Capacity and a Demand Side
	Unit Import Capacity.
	ome import outputity.
Initial Demand Side Unit	The Demand Side Unit MW Response following a Dispatch
Response	Instruction from the TSO when the Demand Side Unit MW
	Response is at 0 MW for a period greater than 24 hours.
Initial Demand Side Unit MW	The time as specified by the Demand Side Unit
Response Time	Operator Dispatchable Demand Customer in the Technical
	Parameter and is the time it takes for the Demand Side Unit
	Operator Dispatchable Demand Customer to be able to
	implement the Initial Demand Side Unit MW Response from
	implement the initial beinging side officially itespolise from

	receipt of the Dispatch Instruction from the TSO .
	reserve of the Siepaton mendentin nom the 1991
Maximum Ramp Down Rate	The maximum Ramp Down Rate of a Demand Side Unit. In
	the case of a Demand Side Unit which consists of an
	Aggregated Demand Site this shall be the aggregated
	maximum Ramp Down Rate of the Individual Demand
	Sites.
Maximum Ramp Up Rate	The maximum Ramp Up Rate of a Demand Side Unit. In the
	case of a Demand Side Unit which consists of an
	Aggregated Demand Site this shall be the aggregated
	maximum Ramp Up Rate of the Individual Demand Sites.
Minimum off time	The minimum time that must elapse from the time of a
	Generation Unit Shutdown before it can be instructed to
	Start-up.
	In the case of Demand Side Units , the minimum time that
	must elapse while the Demand Side Unit MW Response is
	at zero until the next delivery of Demand Side Unit MW
	Response.
Operating Characteristics	The technical capabilities, flexibilities and limitations for the
	operation of a Generation Unit or Demand Side Unit as
	registered or declared in accordance with the provisions of the
	Grid Code.
Shutdown Costs	The costs associated with shutting down a The costs
	associated with shutting down a Demand Side Unit.